


Up to 25 kV

LTN25

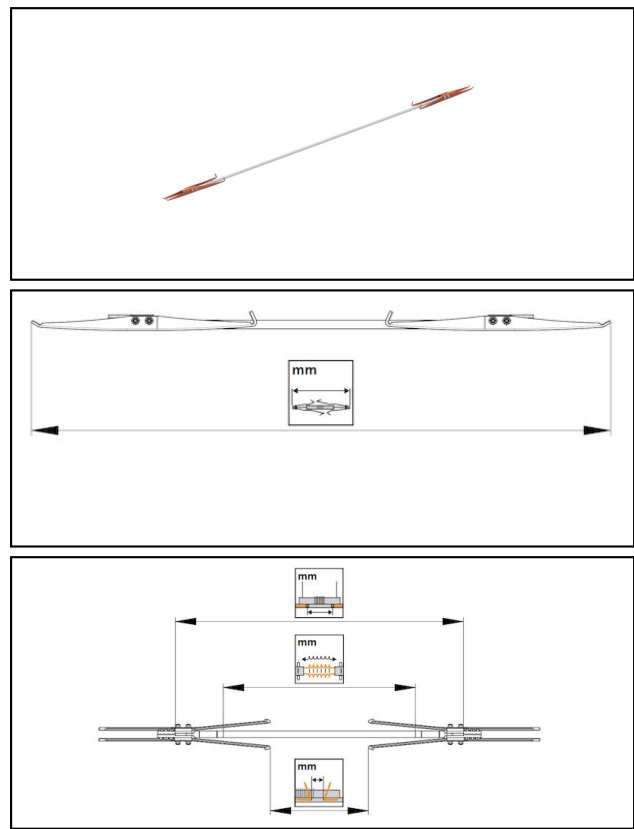

Application
Neutral section to separate different electrical phases or systems
For tramway and light rail
Maximum speed up to 60 km/h

Characteristics
Suspension is not necessary (optionally available)

Material
GRP/PTFE, Cu, CuNiSi, stainless steel

Article-Nr.									
655.266.057	2500	2850	320	2169	3408	max.24			8.2

Accessories									
 Suspension for LT1 625.000.001									
Article-Nr.									
625.000.001								0.43	

Technical Specifications: **LTN25**

	655.266.057
Creeping distance	2500 mm
Length between contact wire	2850 mm
Arcing horn distance	2169 mm
Total length	3408 mm
Width between suspension	320 mm
Recommended service load	max.24 kN
Commercial specification	
country of origin	undefined
Logistic specification	
Kilo / piece	8.2 kg

