


Drahthänger

DHF9H Drahthänger mit Höhenbegrenzung

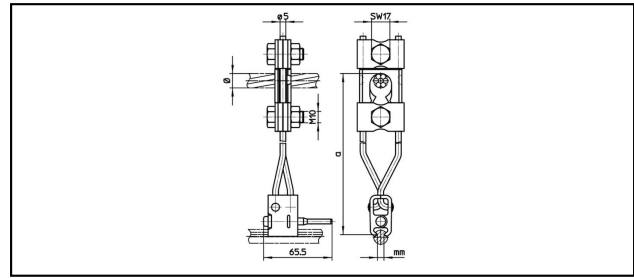

Anwendung
Für Fahrdrahtaufhängung, nicht stromführend

Eigenschaften
Anziehdrehmoment 12-15 Nm

Material
Körper CuNiSi / Draht Cu

Artikel-Nr.		 mm Ø	 mm	 kN	 mm a				 Kg
625.519.000		50 - 150	9 - 15.7	5.6	5	125 - 285			0.38
625.518.000		50 - 150	9 - 15.7	5.6	5	125 - 485			0.45
625.510.000		50 - 150	9 - 15.7	5.6	5	125 - 750			0.547
625.403.732		50 - 150	9 - 15.7	5.6	5	125 - 1500			0.81

Technische Spezifikationen: **Drahthänger mit Höhenbegrenzung DHF9H**

	625.519.000	625.518.000	625.510.000	625.403.732
Länge a	125 - 285 mm	125 - 485 mm	125 - 750 mm	125 - 1500 mm
Tragseil Seilfläche	50 - 150 mm²			
Tragseil Durchmesser	9 - 15.7 mm			
Fahrdraht-Kerbe	5.6 mm			
Ausreisskraft	5 kN			
Kommerzielle Spezifikation				
Zolltarifnummer	85359000			
Ursprungsland	CH			
Logistische Spezifikation				
Kilo / Stück	0.38 kg	0.45 kg	0.547 kg	0.81 kg

