


Gabelendmuffen

GCL275/25

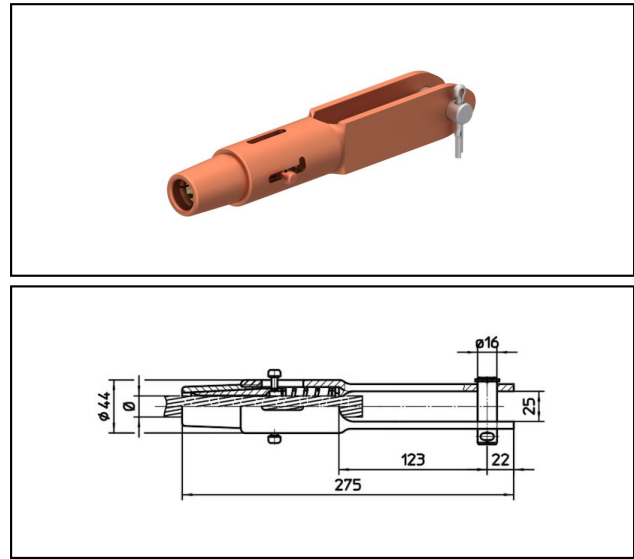

**Anwendung**  
Zugfeste Verbindung für Leiter aus Cu, Staku oder Bz

**Eigenschaften**  
Betriebslast min. 3 kN / max. 25 kN  
Bruchlast des Gehäuses min. 80 kN

**Material**  
Gehäuse CuNiSi / Konus AlBz

| Artikel-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|--|--|-------------------------------------------------------------------------------------|
| 615.108.111 | S180                                                                              | 17.5                                                                              | 180                                                                               |  |  |  |  |  | 1.55                                                                                |
| 615.208.000 | S143                                                                              | 15.8                                                                              | 143                                                                               |  |  |  |  |  | 1.55                                                                                |
| 615.112.171 | S160                                                                              | 16.8                                                                              | 160                                                                               |  |  |  |  |  | 1.55                                                                                |
| 615.129.000 | S240                                                                              | 19.8                                                                              | 240                                                                               |  |  |  |  |  | 1.55                                                                                |

Technische Spezifikationen: **GCL275/25**

|                            |             |             |             |             |
|----------------------------|-------------|-------------|-------------|-------------|
|                            | 615.108.111 | 615.208.000 | 615.112.171 | 615.129.000 |
| Bahn Produkt Name          | S180        | S143        | S160        | S240        |
| Tragseil Durchmesser       | 17.5 mm     | 15.8 mm     | 16.8 mm     | 19.8 mm     |
| Tragseil Seilfläche        | 180 mm²     | 143 mm²     | 160 mm²     | 240 mm²     |
| Kommerzielle Spezifikation |             |             |             |             |
| Zolltarifnummer            | 85359000    |             |             |             |
| Ursprungsland              | CH          |             |             |             |
| Logistische Spezifikation  |             |             |             |             |
| Kilo / Stück               | 1.55 kg     |             |             |             |

