


Seilhänger

SHTF5,1/10V

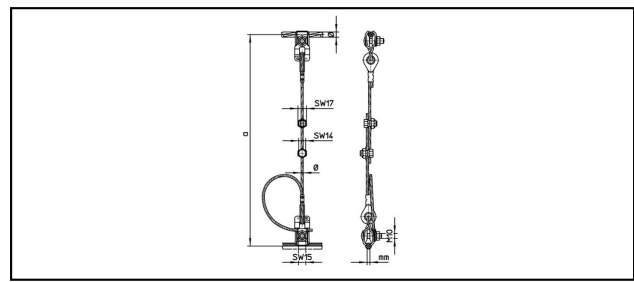

Anwendung
Für Fahrdrahtaufhängung, nicht stromführend

Material
Klemme aus CuNiSi / Inox / Seil Bz 2 / Kausche Kunststoff

Artikel-Nr.									
625.590.201	9 - 13	50 - 95	5.5 - 7	4.5	10	3	750 - 2300		
625.590.203	9 - 13	50 - 95	5.5 - 7	4.5	10	3	750 - 2300		
625.590.204	9 - 13	50 - 95	5.5 - 7	4.5	10	3	750 - 2300		

Technische Spezifikationen: **SHTF5,1/10V**

	625.590.201	625.590.203	625.590.204
Tragseil Durchmesser	9 - 13 mm		
Tragseil Seilfläche	50 - 95 mm²		
Fahrdraht-Kerbe	5.5 - 7 mm		
Hängerseil Durchmesser	4.5 mm		
Hängerseil Fläche	10 mm²		
Ausreisskraft	3 kN		
Länge a	750 - 2300 mm		
Kommerzielle Spezifikation			
Zolltarifnummer	85359000		
Ursprungsland	unbestimmt	CH	

