


Seilhänger

SHZR

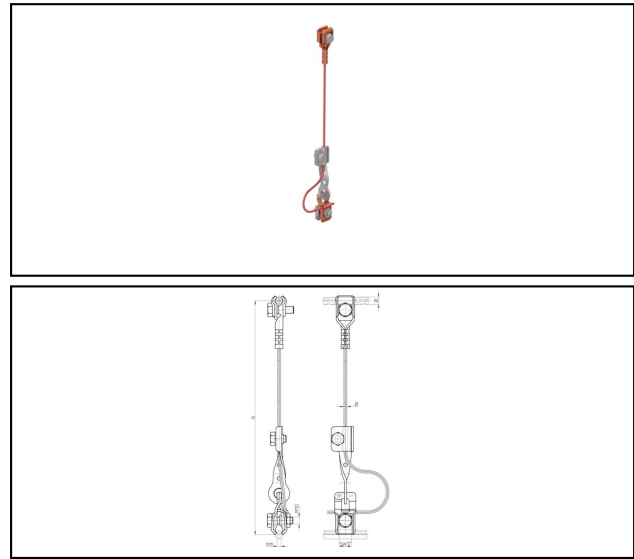

Anwendung
Für Fahrdrahtaufhängungen, stromführend

Eigenschaften
Andere Längen und Fahrdrahtkerben auf Anfrage

Material
Klemme aus CuNiSi/Inox, Regulierteil aus Inox, Seil aus Cu

Artikel-Nr.									
625.628.016	50 - 95	9 - 12.5	10	4.5	3	1600			0.465
625.628.022	50 - 95	9 - 12.5	10	4.5	3	2200			0.521
625.628.028	50 - 95	9 - 12.5	10	4.5	3	2800			0.577
625.628.040	50 - 95	9 - 12.5	10	4.5	3	4000			0.688

Technische Spezifikationen: **SHZR**

	625.628.016	625.628.022	625.628.028	625.628.040
Tragseil Seilfläche	50 - 95 mm²			
Tragseil Durchmesser	9 - 12.5 mm			
Hängerseil Fläche	10 mm²			
Länge a	1600 mm	2200 mm	2800 mm	4000 mm
Hängerseil Durchmesser	4.5 mm			
Ausreisskraft	3 kN			
Kommerzielle Spezifikation				
Zolltarifnummer	85359000		0	
Ursprungsland	CH		unbestimmt	
Logistische Spezifikation				
Kilo / Stück	0.465 kg	0.521 kg	0.577 kg	0.688 kg

