



INSTALLATION INSTRUCTIONS

FIXPOINT CLAMP TYPE FK3-80

Edition 2011/10

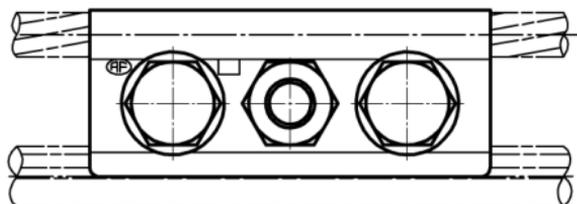

1. Remove the nuts and loosen the screws.
2. Open the clamp.
3. Insert the conductor as shown on the drawing.
4. Tighten the screws with 50 Nm and retighten twice.
5. Mount the nuts and counter them with 20 Nm.

Maintenance and Service

The fixpoint clamp is maintenance free, the life-time correlates with the life-time of the conductor.

