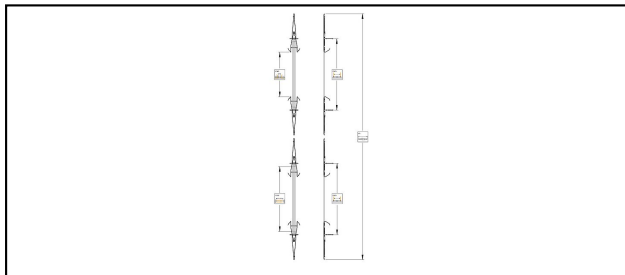
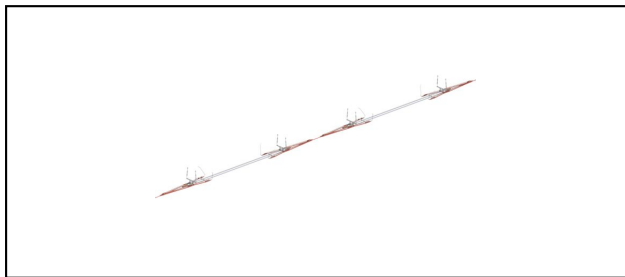


Up to 25 kV

■ **NS25** Neutral section/Phase break**Application**

Phase break to separate different electrical phases or systems
For regional trains and heavy rail
Maximum speed up to 200 km/h

Characteristics

Insulator rods revolvable in case of wear.

Material

GRP/PTFE, Cu, CuNiSi, stainless steel

Article-Nr.									
655.900.042	80 - 150	5.6 - 6.9	8 - 30	2500	2750	3000	1700	9480	43.5

Accessories**Installation jig MH NS25**

Article-Nr.										
690.067.000									21	1
655.901.000									26.3	2
655.900.000									2.9	3

Accessories**Arc catcher NSL25**

Article-Nr.										
690.044.000	150 - 350								16	1

Accessories**SAL**

Article-Nr.									
696.016.010	Al	1610							1.2

Technical Specifications: **Neutral section/Phase break NS25**

Article No.	655.900.042
Contact wire section	80 - 150 mm ²
Contact wire groove	5.6 - 6.9 mm
Creeping distance	2500 mm
Length between suspension	2750 mm
Length between contact wire	3000 mm
Arcing horn distance	1700 mm
Total length	9480 mm
Recommended service load	8 - 30 kN
Minimum breaking load of the section insulator	120 kN
Specified mechanical load (SML)	80 kN
Commercial specification	
Customs number	85354000
country of origin	CH
Logistic specification	
Kilo / piece	43.5 kg

