


Conductor rail section insulators

CRLS3

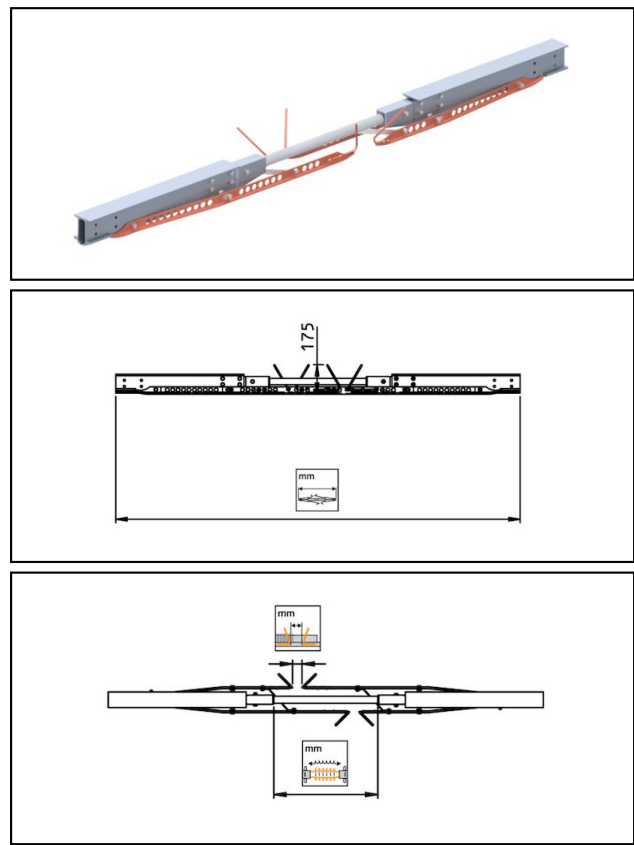

Application
Conductor rail section insulator up to 3 kV DC.

Characteristics
For maximum speed up to 120 km/h

Material
GRP/Silicone rubber, Cu, CuNiSi, stainless steel.

Legend
1) Please contact us for any further information.

Article-Nr.									
655.999.005	80 - 150	600	55	2400					1

Technical Specifications: CRLS3

Article No.	655.999.005
Contact wire section	80 - 150 mm²
Creeping distance	600 mm
Arcing horn distance	55 mm
Length a	2400 mm
comment	1
Commercial specification	
Customs number	0
country of origin	undefined
Texte	
comment	1

