


Conical coupler

KV208 Cone connector

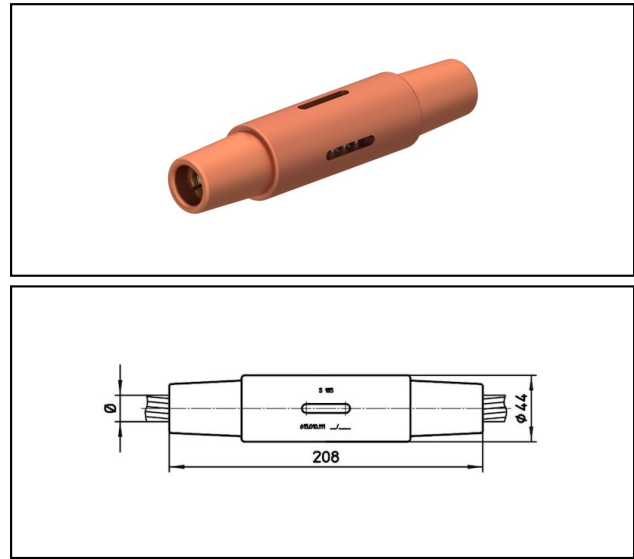

Application
Tension and current-proofed connection for Cu, Bronze, Steel and Cu-Steel cables

Characteristics
Service load min. 3 kN / max. 25 kN

Material
Corpus CuNiSi / Collet AIBz

Legend
1) Colour code

Article-Nr.									
615.239.000	S240	21	240	100				1.5	

Technical Specifications: **Cone connector KV208**

Article No.	615.239.000
Rail product name	S240
Catenary wire diameter	21 mm
Catenary wire section	240 mm ²
Minimum breaking load	100
Commercial specification	
Customs number	85359000
country of origin	CH
Logistic specification	
Kilo / piece	1.5 kg

