


Conical coupler

KV240

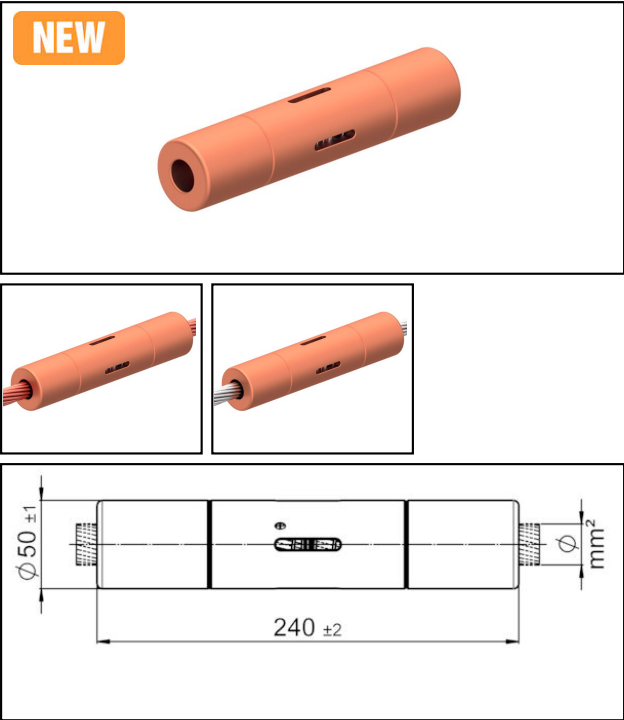

Application
Tension and current-proofed connection for Cu, Bronze, Steel and Cu-Steel cables

Characteristics
Service load min. 3 kN / max. 40 kN
Breaking load of corpus min. 170 kN

Material
Corpus CuNiSi / Cone AlBz

Legend
1) Cone AlBz

Article-Nr.									
615.242.325	Cu325	23.4	323.8						2.63
615.242.356	PH356	24.5	356						2.61



Technical Specifications: **KV240**

	615.242.325	615.242.356
Rail product name	Cu325	PH356
Catenary wire diameter	23.4 mm	24.5 mm
Catenary wire section	323.8 mm²	356 mm²
Commercial specification		
Customs number	0	
country of origin	undefined	
Logistic specification		
Kilo / piece	2.63 kg	2.61 kg

