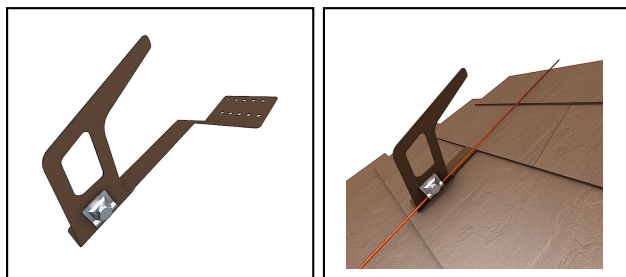


Safety hock cranked

■ DH 1 G Brown

**Characteristics**

Roof safety hook curved made of Inox A2, for mounting with lateral orientation
incl. connection for the H-tested integration in lightning protection
Powder coated brown
Delivery without clamping plate
Promotion: buy 10 get one free !

Article-Nr.	E-Number									
310.002.012		H	InoxA2	1						5

Accessories

Plat head screw 380.000.099

Article-Nr.	E-Number									
380.000.099		InoxA2	D. 8x180							50

Accessories

Plat head screw 380.000.033

Article-Nr.	E-Number									
380.000.033		InoxA2	D. 8x200							50

Accessories

Plat head screw 380.000.034

Article-Nr.	E-Number									
380.000.034		InoxA2	D. 8x250							50

Accessories

Plat head screw 380.000.035

Article-Nr.	E-Number									
380.000.035		InoxA2	D. 8x300							50

Accessories

Plat head screw 380.000.036

Article-Nr.	E-Number									
380.000.036		InoxA2	D. 8x350							50



Accessories



Plat head screw 380.000.100

Article-Nr.	E-Number									
380.000.100		InoxA2	D. 8x400							50

Accessories



Connection plate and screw 285.099.025

Article-Nr.	E-Number									
285.099.025	156 831 650	H	ok	InoxA4	M10x25	6 - 10				25

Accessories



Connection plate for 2 conductors with screw 260.071.002

Article-Nr.	E-Number									
260.071.002	156 831 660	H	ok	InoxA4	M10x25	6 - 10			a)	10

Technical Specifications: **DH 1 G Brown**

	310.002.012
Approved class H / N (EN 62561-1)	H
Material	InoxA2
Number of person	1
Standards	
Test standards Europe	EN 517 Typ B
Commercial specification	
Customs number	73089000
country of origin	CH
Logistic specification	
VPE Weight	9 kg

