


Cable droppers

SHTF4/10V

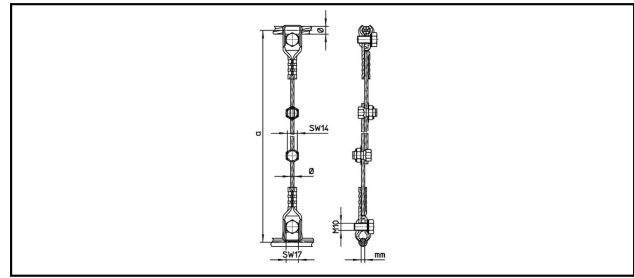

Application
Suspension for contact wire, current feeding

Characteristics
Other lengths and contact wire grooves on request

Material
Clamp CuNiSi / Wire Bz 2

Article-Nr.									
625.512.000	6.5 - 12.5	25 - 95	3 - 8.5	1050 - 1550	4.5	10	3.5		0.401
625.513.000	6.5 - 12.5	25 - 95	3 - 8.5	1350 - 1850	4.5	10	3.5		0.428
625.514.000	6.5 - 12.5	25 - 95	3 - 8.5	1650 - 2150	4.5	10	3.5		0.456
625.537.000	6.5 - 12.5	25 - 95	3 - 8.5	1950 - 2450	4.5	10	3.5		0.483
625.577.000	6.5 - 12.5	25 - 95	3 - 8.5	950 - 1250	4.5	10	3.5		0.378
625.578.000	6.5 - 12.5	25 - 95	3 - 8.5	750 - 1050	4.5	10	3.5		0.355

Technical Specifications: **SHTF4/10V**

	625.512.000	625.513.000	625.514.000	625.537.000
Length a	1050 - 1550 mm	1350 - 1850 mm	1650 - 2150 mm	1950 - 2450 mm
Catenary wire diameter	6.5 - 12.5 mm			
Catenary wire section	25 - 95 mm²			
Contact wire groove	3 - 8.5 mm			
Dropper wire diameter	4.5 mm			
Dropper wire section	10 mm²			
Slipping force	3.5 kN			
Commercial specification				
Customs number	85359000			
country of origin	CH			
Logistic specification				
Kilo / piece	0.401 kg	0.428 kg	0.456 kg	0.483 kg

	625.577.000	625.578.000
Length a	950 - 1250 mm	750 - 1050 mm
Catenary wire diameter	6.5 - 12.5 mm	
Catenary wire section	25 - 95 mm²	
Contact wire groove	3 - 8.5 mm	
Dropper wire diameter	4.5 mm	
Dropper wire section	10 mm²	
Slipping force	3.5 kN	
Commercial specification		
Customs number	85359000	
country of origin	CH	
Logistic specification		
Kilo / piece	0.378 kg	0.355 kg

