


Cable droppers

SHTF4/16V

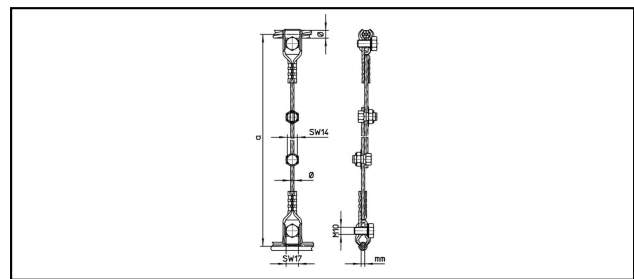

**Application**  
Suspension for contact wire, current feeding

**Characteristics**  
Other lengths and contact wire grooves on request

**Material**  
Clamp CuNiSi / Wire Bz 2

**Legend**  
1) Wire provided by customer  
2) Wire Cu

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 625.551.000 | 6.5 - 12.5                                                                        | 25 - 95                                                                           | 3 - 8.5                                                                           | 750 - 1250                                                                        | 6                                                                                 | 16                                                                                  | 5                                                                                   | 0.48                                                                                |                                                                                     |
| 625.547.000 | 6.5 - 12.5                                                                        | 25 - 95                                                                           | 3 - 8.5                                                                           | 1050 - 1550                                                                       | 6                                                                                 | 16                                                                                  | 5                                                                                   | 0.492                                                                               |                                                                                     |
| 625.548.000 | 6.5 - 12.5                                                                        | 25 - 95                                                                           | 3 - 8.5                                                                           | 1350 - 1850                                                                       | 6                                                                                 | 16                                                                                  | 5                                                                                   | 0.562                                                                               |                                                                                     |
| 625.549.000 | 6.5 - 12.5                                                                        | 25 - 95                                                                           | 3 - 8.5                                                                           | 1650 - 2150                                                                       | 6                                                                                 | 16                                                                                  | 5                                                                                   | 0.614                                                                               |                                                                                     |
| 625.550.000 | 6.5 - 12.5                                                                        | 25 - 95                                                                           | 3 - 8.5                                                                           | 1950 - 2450                                                                       | 6                                                                                 | 16                                                                                  | 5                                                                                   | 0.66                                                                                |                                                                                     |
| 625.608.003 | 6.5 - 12.5                                                                        | 25 - 95                                                                           | 3 - 8.5                                                                           | 1050 - 1550                                                                       | 6                                                                                 | 16                                                                                  | 5                                                                                   | 0.526                                                                               | 1                                                                                   |
| 625.608.004 | 6.5 - 12.5                                                                        | 25 - 95                                                                           | 3 - 8.5                                                                           | 1350 - 1850                                                                       | 6                                                                                 | 16                                                                                  | 5                                                                                   | 0.569                                                                               | 1                                                                                   |

Technical Specifications: SHTF4/16V

|                          |               |                |                |                |
|--------------------------|---------------|----------------|----------------|----------------|
|                          | 625.551.000   | 625.547.000    | 625.548.000    | 625.549.000    |
| Length a                 | 750 - 1250 mm | 1050 - 1550 mm | 1350 - 1850 mm | 1650 - 2150 mm |
| Slipping force           | 5 kN          |                |                |                |
| Dropper wire diameter    | 6 mm          |                |                |                |
| Catenary wire diameter   | 6.5 - 12.5 mm |                |                |                |
| Catenary wire section    | 25 - 95 mm²   |                |                |                |
| Contact wire groove      | 3 - 8.5 mm    |                |                |                |
| Dropper wire section     | 16 mm²        |                |                |                |
| Commercial specification |               |                |                |                |
| Customs number           | 85359000      |                |                |                |
| country of origin        | CH            |                |                |                |
| Logistic specification   |               |                |                |                |
| Kilo / piece             | 0.48 kg       | 0.492 kg       | 0.562 kg       | 0.614 kg       |

|                          |                |                |                |
|--------------------------|----------------|----------------|----------------|
|                          | 625.550.000    | 625.608.003    | 625.608.004    |
| Length a                 | 1950 - 2450 mm | 1050 - 1550 mm | 1350 - 1850 mm |
| Slipping force           | 5 kN           |                |                |
| Dropper wire diameter    | 6 mm           |                |                |
| Catenary wire diameter   | 6.5 - 12.5 mm  |                |                |
| Catenary wire section    | 25 - 95 mm²    |                |                |
| Contact wire groove      | 3 - 8.5 mm     |                |                |
| Dropper wire section     | 16 mm²         |                |                |
| Commercial specification |                |                |                |
| Customs number           | 85359000       |                |                |
| country of origin        | CH             | undefined      |                |
| Logistic specification   |                |                |                |
| Kilo / piece             | 0.66 kg        | 0.526 kg       | 0.569 kg       |

