


Cable droppers

■ SHTF4/25V

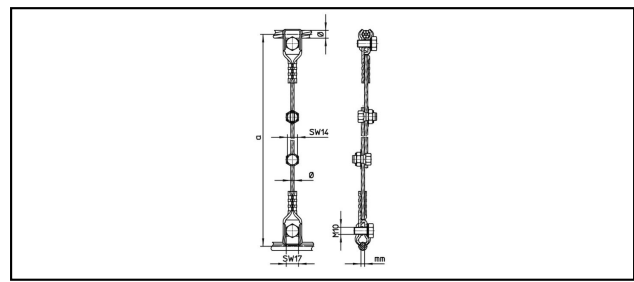

Application
Suspension for contact wire, current feeding

Material
Clamp CuNiSi / Wire Bz 2

Article-Nr.									
625.559.000	6.5 - 12.5	25 - 95	3 - 8.5	750 - 1250	7.5	25	5		0.7
625.560.000	6.5 - 12.5	25 - 95	3 - 8.5	1050 - 1550	7.5	25	5		0.774
625.561.000	6.5 - 12.5	25 - 95	3 - 8.5	1350 - 1850	7.5	25	5		0.844

Technical Specifications: **SHTF4/25V**

	625.559.000	625.560.000	625.561.000
Length a	750 - 1250 mm	1050 - 1550 mm	1350 - 1850 mm
Catenary wire diameter	6.5 - 12.5 mm		
Catenary wire section	25 - 95 mm²		
Contact wire groove	3 - 8.5 mm		
Dropper wire diameter	7.5 mm		
Dropper wire section	25 mm²		
Slipping force	5 kN		
Commercial specification			
Customs number	85359020		
country of origin	undefined	CH	
Logistic specification			
Kilo / piece	0.7 kg	0.774 kg	0.844 kg

