


Cable droppers

■ SHTF1/10V Spc.

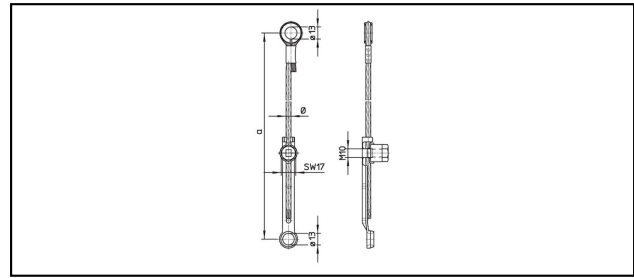

Application
For cable droppers, non-current feeding

Characteristics
Other lengths on request

Material
Adjustable part CuNiSi / Wire Bz 2 / Thimble Cu

Article-Nr.									
625.223.630	170 - 1520	4.5	10	1.3					0.274
625.227.634	170 - 2720	4.5	10	1.3					0.386
625.228.635	170 - 3020	4.5	10	1.3					0.413
625.224.631	170 - 1820	4.5	10	1.3					0.302
625.225.632	170 - 2120	4.5	10	1.3					0.33
625.226.633	170 - 2420	4.5	10	1.3					0.358

Technical Specifications: **SHTF1/10V Spc.**

	625.223.630	625.227.634	625.228.635	625.224.631
Length a	170 - 1520 mm	170 - 2720 mm	170 - 3020 mm	170 - 1820 mm
Dropper wire diameter	4.5 mm			
Dropper wire section	10 mm²			
Slipping force	1.3 kN			
Commercial specification				
Customs number	85359000			
country of origin	CH			
Logistic specification				
Kilo / piece	0.274 kg	0.386 kg	0.413 kg	0.302 kg

	625.225.632	625.226.633
Length a	170 - 2120 mm	170 - 2420 mm
Dropper wire diameter	4.5 mm	
Dropper wire section	10 mm²	
Slipping force	1.3 kN	
Commercial specification		
Customs number	85359000	
country of origin	CH	
Logistic specification		
Kilo / piece	0.33 kg	0.358 kg

