


Conductor connections and junctions

■ AV 4 Cable lug

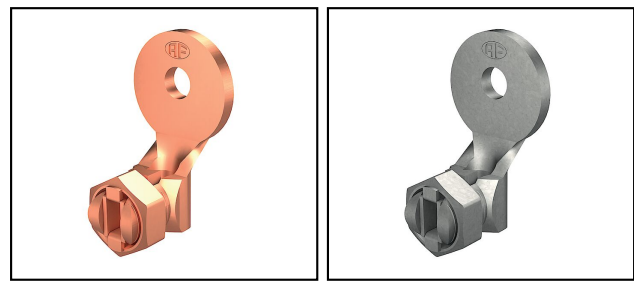

**Characteristics**  
For connectors to constructional element. Material thickness greater than 1mm.

- Legend**  
a) With mounting holes 2x Ø 6mm and 3x Ø 4mm  
b) With mounting holes 2x Ø 6mm and 3x Ø 4mm

| Article-Nr. | E-Number    |  |  |  |  |  |  |  |  |  |
|-------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 275.030.004 | 156 831 360 | H                                                                                 | CuvSn                                                                             | 6                                                                                 | 8                                                                                 | 10 - 25                                                                           |  |  |                                                                                     | 50                                                                                  |



Technical Specifications: **Cable lug AV 4**

|                                       |                 |
|---------------------------------------|-----------------|
| Article No.                           | 275.030.004     |
| Approved class H / N (EN 62561-1)     | H               |
| Material                              | CuvSn           |
| Wire diameter                         | 6 mm            |
| Eyelet diameter                       | 8 mm            |
| Nominal cross section conductor       | 10 - 25 mm²     |
| Type of connector                     | Access-clip     |
| Mounting hole                         | 8 mm            |
| Surface protection                    | Galvanic tinned |
| Suitable for diameter round conductor | 6 mm            |
| required torque                       | 15 N·m          |
| Commercial specification              |                 |
| Customs number                        | 85389000        |
| country of origin                     | CH              |
| Logistic specification                |                 |
| VPE Weight                            | 3.36 kg         |

