


Messenger wire and contact wire insulators

■ TSIO20.25 Catenary insulators

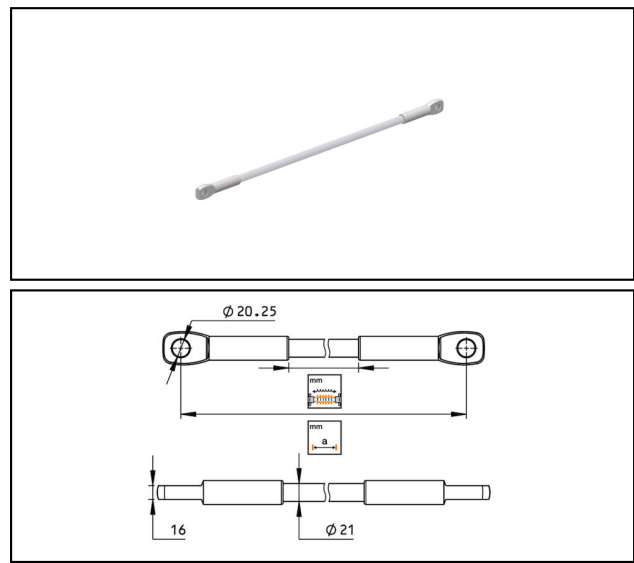

Application
Catenary insulator

Characteristics
SML: 100 kN
Nominal working tensile load 40 kN

Material
Stainless steel, fiberglass rod PTFE coated

Article-Nr.									
657.007.724	2750	2500							2.9



Technical Specifications: **Catenary insulators TSIO20.25**

Article No.	657.007.724
Length a	2750 mm
Creeping distance	2500 mm
Specified mechanical load (SML)	100 kN
Commercial specification	
Customs number	85353000
country of origin	CH
Logistic specification	
Kilo / piece	2.9 kg

