


Interception components

■ **FL 31** Conductor holder for flat tiles (nailed)

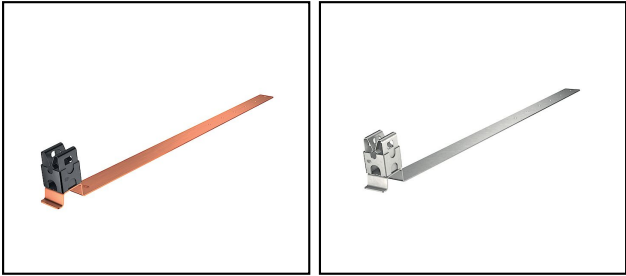

**Characteristics**  
With Quadro wire holder, swivelling, preassembled for wire Ø 6mm

**Legend**  
a) Quadro of black Inox A2

| Article-Nr. | E-Number    |  |  |  |  |  |  |  |  |  |
|-------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|--|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 225.020.000 | 156 950 310 | Cu                                                                                | 400                                                                               | 6/8/9/10                                                                          |  |  |  |  | a)                                                                                  | 50                                                                                  |
| 220.024.000 | 156 950 330 | InoxA2                                                                            | 400                                                                               | 6/8/9/10                                                                          |  |  |  |  |                                                                                     | 50                                                                                  |

Technical Specifications: **Conductor holder for flat tiles (nailed) FL 31**

|                          |                      |                      |
|--------------------------|----------------------|----------------------|
|                          | 225.020.000          | 220.024.000          |
| Material                 | Cu                   | InoxA2               |
| Length a                 | 400 mm               |                      |
| Wire diameter            | 6/8/9/10 mm          |                      |
| Material of carrier      | Copper               | Stainless steel (A2) |
| Application              | Roof surface pitched |                      |
| Mounting method          | Other                |                      |
| Mounting type conductor  | With snap clamp      |                      |
| Commercial specification |                      |                      |
| Customs number           | 85389000             |                      |
| country of origin        | CH                   |                      |
| Logistic specification   |                      |                      |
| VPE Weight               | 4.744 kg             | 4.137 kg             |

