


Conical coupler

KV186 Cone connector

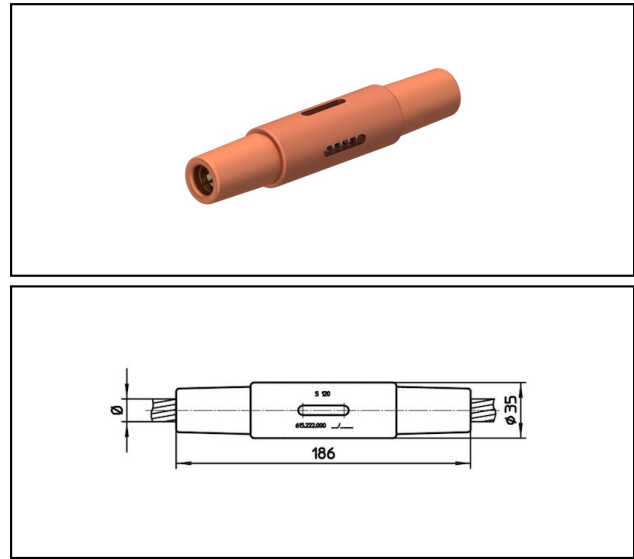

Application
Tension and current-proofed connection for Cu, Bronze, Steel and Cu-Steel cables

Characteristics
Service load min. 3 kN / max. 25 kN
Breaking load of corpus min. 80 kN

Material
Corpus CuNiSi / Collet AIBz resp. stainless steel

Legend
1) Colour code

Article-Nr.									
615.222.000	S120	14.5	120					0.78	

Technical Specifications: **Cone connector KV186**

Article No.	615.222.000
Rail product name	S120
Catenary wire diameter	14.5 mm
Catenary wire section	120 mm ²
Commercial specification	
Customs number	85359000
country of origin	CH
Logistic specification	
Kilo / piece	0.78 kg

