


Conical coupler

**KV208** Cone connector

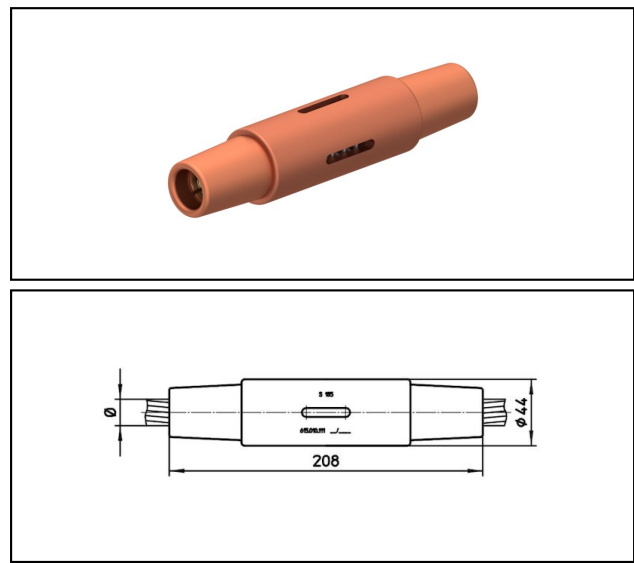

**Application**  
Tension and current-proofed connection for Cu, Bronze, Steel and Cu-Steel cables

**Characteristics**  
Service load min. 3 kN / max. 25 kN

**Material**  
Corpus CuNiSi / Collet AIBz

**Legend**  
1) Colour code

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 615.220.000 | S161                                                                              | 16.75                                                                             | 161                                                                               | 80                                                                                |  |  |  | 1.55                                                                                | 1                                                                                   |

Technical Specifications: **Cone connector KV208**

|                               |                     |
|-------------------------------|---------------------|
| Article No.                   | 615.220.000         |
| <b>Rail product name</b>      | S161                |
| <b>Catenary wire diameter</b> | 16.75 mm            |
| <b>Catenary wire section</b>  | 161 mm <sup>2</sup> |
| <b>Minimum breaking load</b>  | 80                  |
|                               |                     |
| <b>comment</b>                | 1                   |
| Commercial specification      |                     |
| <b>Customs number</b>         | 85359000            |
| <b>country of origin</b>      | CH                  |
| Texte                         |                     |
| <b>comment</b>                | 1                   |
| Logistic specification        |                     |
| <b>Kilo / piece</b>           | 1.55 kg             |

