


Conical coupler

KV232

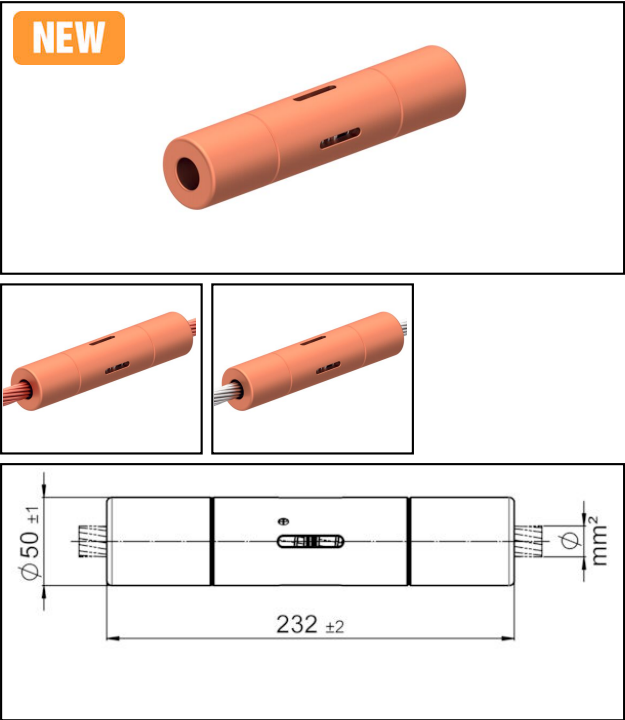

Application
Tension and current-proofed connection for Cu, Bronze, Steel and Cu-Steel cables

Characteristics
Service load min. 3 kN / max. 40 kN
Breaking load of corpus min. 170 kN

Material
Corpus CuNiSi

Legend
1) Cone INOX
2) Cone AlBz

Article-Nr.									
615.242.180	ST180	17.5	183					2.81	1
615.242.200	PH200	18.5	204.3					2.76	2

Technical Specifications: **KV232**

	615.242.180	615.242.200
Rail product name	ST180	PH200
Catenary wire diameter	17.5 mm	18.5 mm
Catenary wire section	183 mm ²	204.3 mm ²
Commercial specification		
Customs number	85359000	
country of origin	undefined	CH
Logistic specification		
Kilo / piece	2.81 kg	2.76 kg

