


Conical coupler

RV176

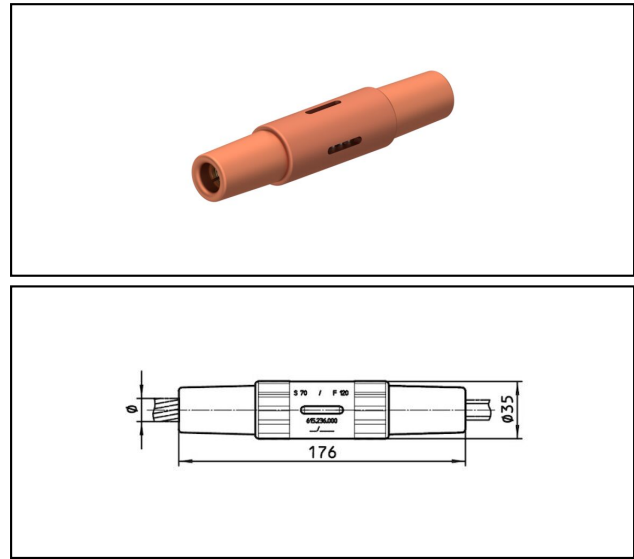

Application
Tensioned and current-proofed Cu, Cu-Steel or Bz cables

Characteristics
Service load min. 3 kN / max. 25 kN
Breaking load of corpus min. 80 kN

Material
Corpus CuNiSi / Collet AIBz

Legend
1) With colour code

Article-Nr.									
615.236.000	S70/FD120	10.5	70	13.2	120			0.8	1
615.238.000	S120/FD120	14.5	120	13.8	120			0.8	1

Technical Specifications: **RV176**

	615.236.000	615.238.000
Rail product name	S70/FD120	S120/FD120
Catenary wire diameter	10.5 mm	14.5 mm
Catenary wire section	70 mm²	120 mm²
Contact wire diameter	13.2 mm	13.8 mm
Contact wire section	120 mm²	
Commercial specification		
Customs number	85359000	
country of origin	CH	
Logistic specification		
Kilo / piece	0.8 kg	

