


Conductor connections and junctions

■ AV 25 Connecting lug

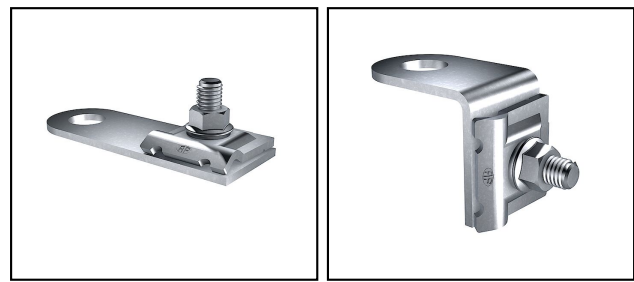

Legend
a) for isolated fall protection, side length to middle hole 70mm

Article-Nr.	E-Number									
270.055.000	156 801 100	H	InoxA2	M8x30	6 - 10	16.5	180			25
270.055.004	156 801 600	H	InoxA2	M8x30	6 - 10	22	180			25
270.055.001	156 801 200	H	InoxA2	M8x30	6 - 10	16.5	45			25
270.055.006	156 801 500	H	InoxA2	M8x30	6 - 10	13	90		a)	25
270.055.002	156 801 300	H	InoxA2	M8x30	6 - 10	16.5	90			25
270.055.003	156 801 400	H	InoxA2	M8x30	6 - 10	22	90			25

Technical Specifications: **Connecting lug AV 25**

	270.055.000	270.055.004	270.055.001	270.055.006
Approved class H / N (EN 62561-1)	H			
Material	InoxA2			
Wire diameter	6 - 10 mm			
Eyelet diameter	16.5 mm	22 mm	16.5 mm	13 mm
Screw	M8x30			
Deflection (angle)	180 °		45 °	90 °
Type of connector	Access-clip			
Type of fastening screws	Hexagon screw			
Surface protection	unbehandelt			
required torque	12 N·m			
Commercial specification				
Customs number	85389000			85389040
country of origin	CH			
Logistic specification				
VPE Weight	2.952 kg		2.93 kg	3.75 kg

	270.055.002	270.055.003
Approved class H / N (EN 62561-1)	H	
Material	InoxA2	
Wire diameter	6 - 10 mm	
Eyelet diameter	16.5 mm	22 mm
Screw	M8x30	
Deflection (angle)	90 °	
Type of connector	Access-clip	
Type of fastening screws	Hexagon screw	
Surface protection	unbehandelt	
required torque	12 N·m	
Commercial specification		
Customs number	85389000	
country of origin	CH	
Logistic specification		
VPE Weight	2.98 kg	2.815 kg

