


Conductor connections and junctions

AV 7 Connection set for sheet metal

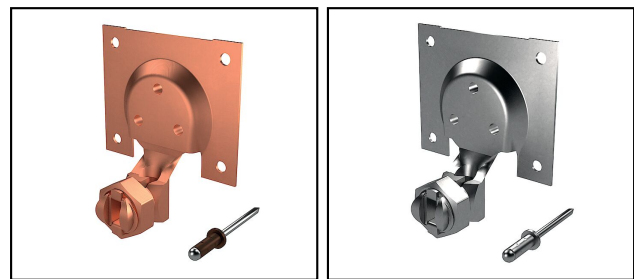

Application
 For the following material thicknesses:
 Inox, TiZn, Cu and AL up to 0.9 mm
 TiZn 0.7 to 0.9 mm
 Cu 0.6 to 0.9 mm

Characteristics
 Connection set for sheet metal ≥ 0.5 mm, including 7 rivets for lightening current carrying connection. Set can be also assembled on PVC coated surfaces.
 Conductor connection screwed
 New: Riveting with hand pliers possible
 New: Higher pull-out forces (H-Test)
 New: The tightness is tested and guaranteed
 New: The tightness compared to the old rivets has been improved (better surface pressure)
 New: Tightness and H- certification guaranteed even after aging

Legend
 a) Cable lug made of tinned copper

Article-Nr.	E-Number									
275.060.000	156 843 320	H	Cu	6	25					20
270.090.000	156 843 520	H	InoxA2	6	25				a)	20

Accessories										
 Multi-range blind rivets AV 81										
Article-Nr.	E-Number									
275.063.011	156 990 020	H	0.5 - 6.5	10	RAL 9006, silver	4.1			a)	70
275.063.012	156 990 030	H	0.5 - 6.5	10	RAL 8014, brown	4.1			b)	70

Technical Specifications: **Connection set for sheet metal AV 7**

	275.060.000	270.090.000
Approved class H / N (EN 62561-1)	H	
Material	Cu	InoxA2
Wire diameter	6 mm	
Nominal cross section conductor	25 mm²	
Surface protection	untreated	
Type of connector	Access-clip	
required torque	15 N·m	
Commercial specification		
Customs number	85389000	
country of origin	CH	
Logistic specification		
VPE Weight	2.27 kg	2.22 kg

