


Foundation earthing components






■ FE 64 Connection set Vario

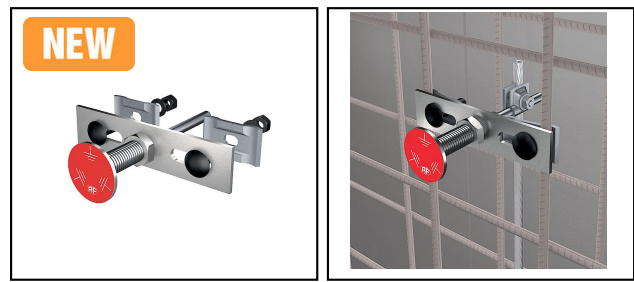

- Application**
- Electrical discharge of the short-circuit possible via 1 reinforcing bar with Ø10mm or separate earthing conductor.
 - Pretensioning of 15mm against formwork necessary.

- Characteristics**
- Connection set Vario for variable installation in all installation positions.
 - Fastening without nails.
 - Stepless adjustment possible via the thread.
 - Clean connection after striking due to new adhesive.
- Pretensioning of 15mm against formwork necessary.
Electrical discharge of the short-circuit possible via 1 reinforcing bar with Ø10mm or separate earthing conductor.

- Content**
- 1 Connection part
 - 1 Mounting bracket
 - 2 connection plates
 - 1 Connection part (type FE 27)
 - 1 Around cross clamp (type FE 45)
 - 3 Clout nails made of stainless steel

| Article-Nr. | E-Number |  |  |  |  | | | | |  |
|-------------|-------------|--|--|--|--|--|--|--|--|--|
| 261.051.000 | 156 940 730 | 6 | InoxA4 | M10x25 | 6 - 22 | | | | | 1 |



Technical Specifications: **Connection set Vario FE 64**

| | |
|----------------------------------|------------------------|
| | 261.051.000 |
| Short circuit current | 6 kA/1s |
| Material | InoxA4 |
| Screw | M10x25 |
| Clamping range round | 6 - 22 mm |
| Diameter connection plate | 50 mm |
| Connecting shaft | 10 mm |
| Material connection lug | rostfreier Stahl (V4A) |
| Length | 180 mm |
| Bolt dimension metric | 10 |
| Commercial specification | |
| Customs number | 85389030 |
| country of origin | CH |
| Logistic specification | |
| VPE Weight | 6.81 kg |

