


Conductor connections and junctions

■ AV 24 Connector for profile rails

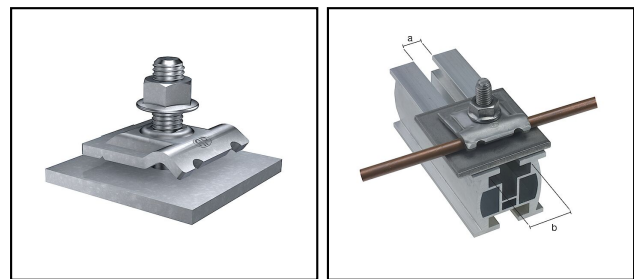

**Characteristics**  
With hammer head screws for profile rails.

| Article-Nr. | E-Number    |  |  |  |  |  |  |  |  |
|-------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 260.062.050 | 156 831 590 | H                                                                                 | InoxA2                                                                            | M8x35                                                                             | 6 - 10                                                                            |                                                                                   | 10.5 - 11                                                                           | 23                                                                                  | 50                                                                                  |

Technical Specifications: **Connector for profile rails AV 24**

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| Article No.                       | 260.062.050                       |
| Approved class H / N (EN 62561-1) | H                                 |
| Material                          | InoxA2                            |
| Screw                             | M8x35                             |
| Wire diameter                     | 6 - 10 mm                         |
| Type of connector                 | Connection clamp                  |
| Type of fastening screws          | Hexagon screw                     |
| Suitable for connection           | Round conductor Rd 6-10 / Rd 6-10 |
| Surface protection                | unbehandelt                       |
| Length a                          | 10.5 - 11 mm                      |
| Width b                           | 23 mm                             |
| required torque                   | 12 N·m                            |
| Commercial specification          |                                   |
| Customs number                    | 85389000                          |
| country of origin                 | CH                                |
| Logistic specification            |                                   |
| VPE Weight                        | 6.42 kg                           |

