


Down-conductor components

■ **AL 3** Contact clip adjustable

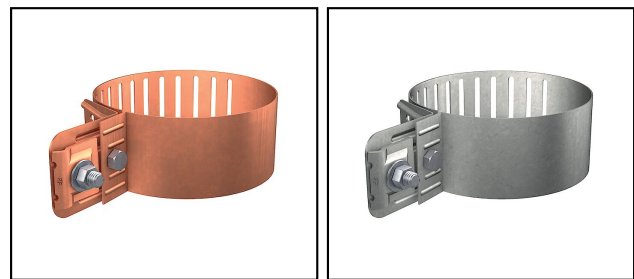

Article-Nr.	E-Number									
285.103.000	156 831 160	H	Cu	6 - 10	M8x30	70 - 120				25
280.101.000	156 831 170	H	InoxA2	6 - 10	M8x30	70 - 120				25
280.102.000	156 831 180	H	InoxA2	6 - 10	M8x30	50 - 100				25

Technical Specifications: **Contact clip adjustable AL 3**

	285.103.000	280.101.000	280.102.000
Approved class H / N (EN 62561-1)	H		
Material	Cu	InoxA2	
Wire diameter	6 - 10 mm		
Screw	M8x30		
Clamping range round	70 - 120 mm		50 - 100 mm
Surface protection	unbehandelt		
Number of conductors	1		
Cross section of the connecting conductors	25 - 75 mm²		
Clamping/chucking range	70 - 120 mm		50 - 100 mm
required torque	12 N·m		
Commercial specification			
Customs number	85389000		
country of origin	CH		
Logistic specification			
VPE Weight	7.49 kg	5.76 kg	5.062 kg

