


Messenger wire and contact wire insulators

FDI Contact wire insulators

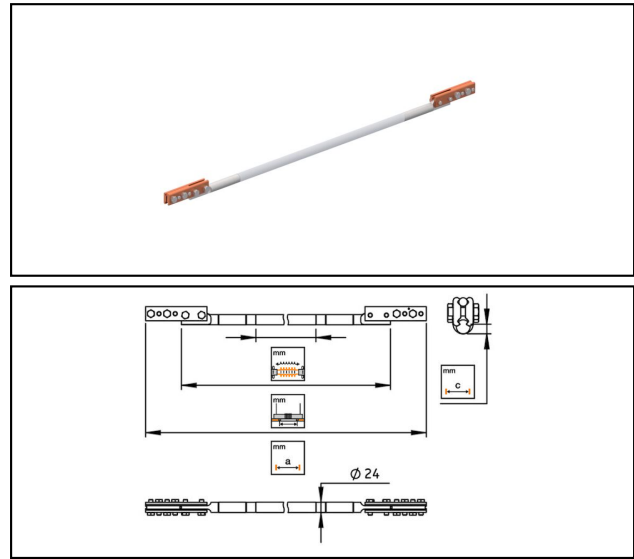

Application
Contact wire insulator

Characteristics
SML: ≥ 80 kN
Min. breaking load: 80 kN

Material
Stainless steel, CuNiSi, GRP rod PTFE coated

Legend
1) EN 50 149
2) ASTH B-9 / ASTH B-47

Article-Nr.									
655.260.000	350MCM	177.3	6.78	1116	11.84	600	946	2.5	2

Technical Specifications: **Contact wire insulators FDI**

Article No.	655.260.000
Specified mechanical load (SML)	80 kN
Contact wire diameter	350MCM
Contact wire section	177.3 mm ²
Contact wire groove	6.78 mm
Length a	1116 mm
Height c	11.84 mm
Creeping distance	600 mm
Length between contact wire	946 mm
comment	2
Commercial specification	
Customs number	85353000
country of origin	CH
Texte	
comment	2
Logistic specification	
Kilo / piece	2.5 kg

