


Messenger wire and contact wire insulators

FDIS Contact wire insulators

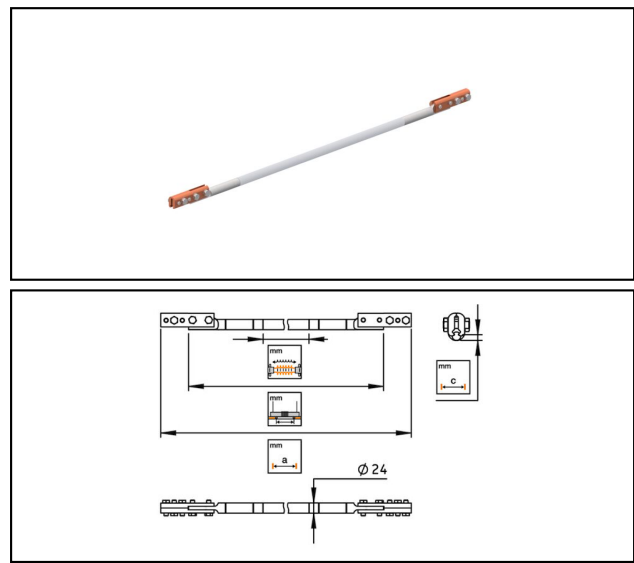

Application
Contact wire insulator

Characteristics
SML of insulator: 80 kN
Min. breaking load: 60kN

Material
Stainless steel, CuNiSi, GRP rod PTFE coated

Legend
1) EN 50 149
2) ED 171
3) BS 23

Article-Nr.	mm Ø	mm ²	mm	mm	mm	mm	mm	Kg	
655.295.000	AC-80	80	5.6	1576	6.8	1100	1446	2.8	

Technical Specifications: **Contact wire insulators FDIS**

Article No.	655.295.000
Specified mechanical load (SML)	80 kN
Contact wire diameter	AC-80
Contact wire section	80 mm ²
Contact wire groove	5.6 mm
Length a	1576 mm
Height c	6.8 mm
Creeping distance	1100 mm
Length between contact wire	1446 mm
Commercial specification	
Customs number	85353000
country of origin	CH
Logistic specification	
Kilo / piece	2.8 kg

