


Splice fittings

SKF6-153

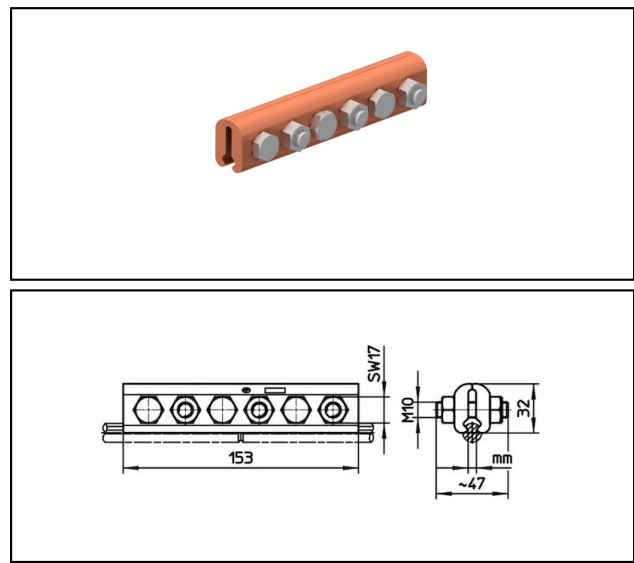

Application
Contact wire splice fitting for copper or copper alloy contact wire

Characteristics
Torque 50 Nm

Material
Clamping plates CuNiSi

Legend
1) With washer with spherical seal
2) Special high tensile CuNiSi

Article-Nr.									
635.010.000	5 - 6.9	- 150	- 150	- 107	- 107			0.9	1
635.322.000	5 - 6.9	- 150	- 150	- 107	- 107			0.87	
635.363.000	5.6 - 6.9	- 150	- 150	- 150	- 150			0.87	2

Technical Specifications: **SKF6-153**

	635.010.000	635.322.000	635.363.000
Starting torque	50 N·m		
Contact wire section Cu	- 150 mm²		
Contact wire section CuMg 0.2	- 107 mm²	- 150 mm²	
Contact wire section CuMg 0.5	- 107 mm²	- 150 mm²	
Contact wire section CuAg	- 150 mm²		
Contact wire groove	5 - 6.9 mm	5.6 - 6.9 mm	
Commercial specification			
Customs number	85359000		
country of origin	CH		
Logistic specification			
Kilo / piece	0.9 kg	0.87 kg	

