


Splice fittings

■ SKR217

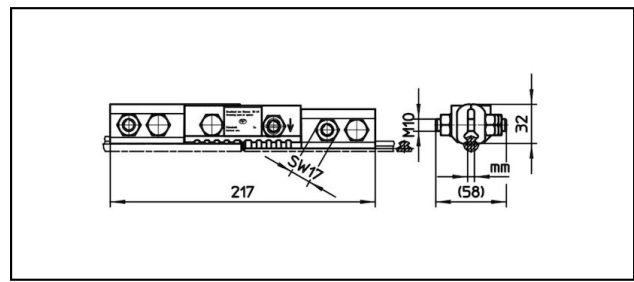

Application
Contact wire splice fitting adjustable for copper or copper alloy contact wire

Characteristics
Torque 50 Nm

Material
Clamping plates CuNiSi

Legend
1) With suspension lug
2) Special high tensile CuNiSi

Article-Nr.									
635.166.000	- 150	- 150	- 150	5.6 - 6.9				1.45	2
635.166.001	- 150	- 150	- 150	8.5				1.5	2
635.043.000	- 150	- 120	- 150	3.75				1.35	
635.025.000	- 150	- 120	- 150	5.6 - 6.9				1.35	
635.349.000	- 150	- 120	- 150	5.6 - 6.9				1.4	1

Technical Specifications: **SKR217**

	635.166.000	635.166.001	635.043.000	635.025.000
Starting torque	50 N·m			
Contact wire section Cu	- 150 mm²			
Contact wire section CuMg 0.2	- 150 mm²		- 120 mm²	
Contact wire section CuAg	- 150 mm²			
Contact wire groove	5.6 - 6.9 mm			
Commercial specification				
Customs number	85359000			
country of origin	undefined	CH		
Logistic specification				
Kilo / piece	1.45 kg	1.5 kg	1.35 kg	

	635.349.000
Starting torque	50 N·m
Contact wire section Cu	- 150 mm²
Contact wire section CuMg 0.2	- 120 mm²
Contact wire section CuAg	- 150 mm²
Contact wire groove	5.6 - 6.9 mm
Commercial specification	
Customs number	85359000
country of origin	CH
Logistic specification	
Kilo / piece	1.4 kg

