


Splice fittings

■ SKF6-153 Splice fitting

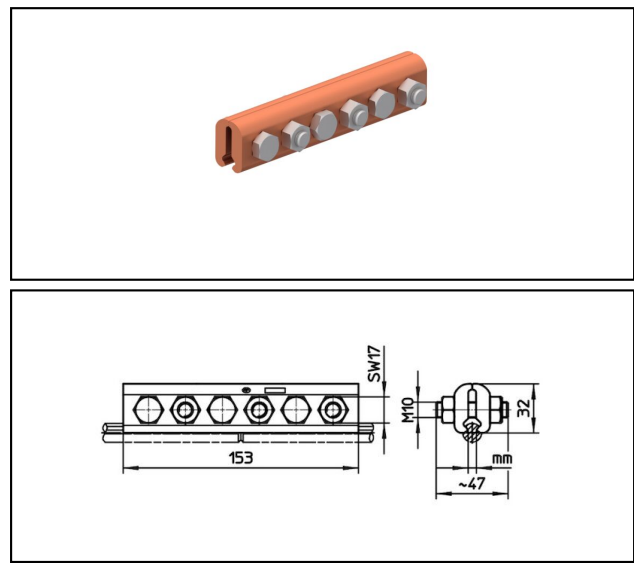

**Application**  
Contact wire splice fitting for copper or copper alloy contact wire

**Characteristics**  
Torque 50 Nm

**Material**  
Clamping plates CuNiSi

**Legend**  
1) With washer with spherical seal  
2) Special high tensile CuNiSi

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 635.363.000 | 5.6 - 6.9                                                                         | - 150                                                                             | - 150                                                                             | - 150                                                                             | - 150                                                                             |  |  | 0.87                                                                                | 2                                                                                   |

Technical Specifications: **Splice fitting SKF6-153**

|                               |              |
|-------------------------------|--------------|
| Article No.                   | 635.363.000  |
| Starting torque               | 50 N·m       |
| Contact wire section Cu       | - 150 mm²    |
| Contact wire section CuMg 0.2 | - 150 mm²    |
| Contact wire section CuMg 0.5 | - 150 mm²    |
| Contact wire section CuAg     | - 150 mm²    |
| Contact wire groove           | 5.6 - 6.9 mm |
|                               |              |
| comment                       | 2            |
| Commercial specification      |              |
| Customs number                | 85359000     |
| country of origin             | CH           |
| Texte                         |              |
| comment                       | 2            |
| Logistic specification        |              |
| Kilo / piece                  | 0.87 kg      |

