


Conductor connections and junctions

■ AV 10 Crimping sleeve DIN

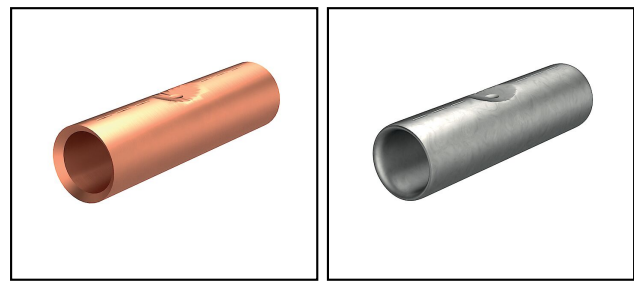

Characteristics  
For hexagonal pressing

| Article-Nr. | E-Number    |  |  |  |  |  |  |  |  |  |
|-------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--|--|-------------------------------------------------------------------------------------|
| 414.061.531 | 156 071 109 | H                                                                                 |                                                                                   | CuvSn                                                                             | 10                                                                                | 6                                                                                 | 25                                                                                  |  |  | 25                                                                                  |

Technical Specifications: **Crimping sleeve DIN AV 10**

|                                   |                      |
|-----------------------------------|----------------------|
| Article No.                       | 414.061.531          |
| Approved class H / N (EN 62561-1) | H                    |
| Material                          | CuvSn                |
| KZ size of insert for crimp tool  | 10                   |
| Wire diameter                     | 6 mm                 |
| Nominal cross section conductor   | 25 mm²               |
| Surface protection                | Tinned               |
| Nominal cross section             | 25 mm²               |
| Useful for stranded conductors    | Yes                  |
| Model                             | DIN-version          |
| Number of branches                | 2                    |
| For pull protected connections    | No                   |
| Sleeve form                       | Short                |
| Suitable for solid cores          | Yes                  |
| Voltage level                     | Up to 230/380 V      |
| Suitable for round conductors     | Yes                  |
| Oil stop/centre bar               | No                   |
| Insulation                        | None                 |
| Type of connection                | Percussion connector |
| Commercial specification          |                      |
| Customs number                    | 85389000             |
| country of origin                 | CE                   |
| Logistic specification            |                      |
| VPE Weight                        | 0.458 kg             |

