


Conductor connections and junctions

■ AV 14 Crimping wire lug, 3-hole

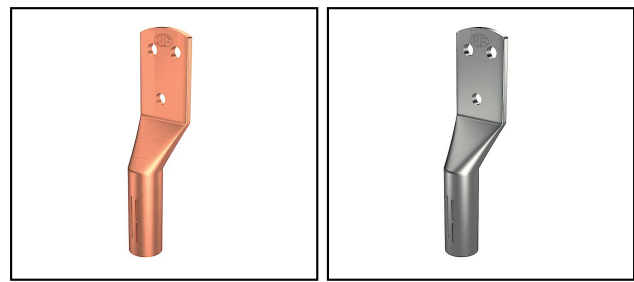

Characteristics  
For hexagonal pressing

| Article-Nr. | E-Number    |  |  |  |  |  |  |  |  |  |
|-------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|-------------------------------------------------------------------------------------|
| 414.060.062 | 156 341 570 | Cu                                                                                | 10                                                                                | 6                                                                                 | 25                                                                                | 3x4.1                                                                             |  |  |  | 25                                                                                  |
| 414.060.112 | 156 341 580 | Cu                                                                                | 12                                                                                | 8                                                                                 | 35                                                                                | 3x4.1                                                                             |  |  |  | 25                                                                                  |
| 414.060.063 | 156 340 570 | CuSn                                                                              | 10                                                                                | 6                                                                                 | 25                                                                                | 3x4.1                                                                             |  |  |  | 25                                                                                  |
| 414.060.113 | 156 340 580 | CuSn                                                                              | 12                                                                                | 8                                                                                 | 35                                                                                | 3x4.1                                                                             |  |  |  | 25                                                                                  |

Technical Specifications: **Crimping wire lug, 3-hole AV 14**

|                                  |             |             |             |             |
|----------------------------------|-------------|-------------|-------------|-------------|
|                                  | 414.060.062 | 414.060.112 | 414.060.063 | 414.060.113 |
| Material                         | Cu          |             | CuvSn       |             |
| KZ size of insert for crimp tool | 10          | 12          | 10          | 12          |
| Wire diameter                    | 6 mm        | 8 mm        | 6 mm        | 8 mm        |
| Nominal cross section conductor  | 25 mm²      | 35 mm²      | 25 mm²      | 35 mm²      |
| Eyelet diameter                  | 3x4.1 mm    |             |             |             |
| Connecting angle                 | Straight    |             |             |             |
| Surface protection               | blank       |             | Tinned      |             |
| Bolt dimension metric            | 6           | 8           | 6           | 8           |
| Number of mounting holes         | 3           |             |             |             |
| Commercial specification         |             |             |             |             |
| Customs number                   | 85389000    |             |             |             |
| country of origin                | CE          |             |             |             |
| Logistic specification           |             |             |             |             |
| VPE Weight                       | 0.43 kg     | 0.8 kg      | 0.441 kg    | 0.723 kg    |

