


Equipotential profile variable

■ PA 30 Equipotential profile

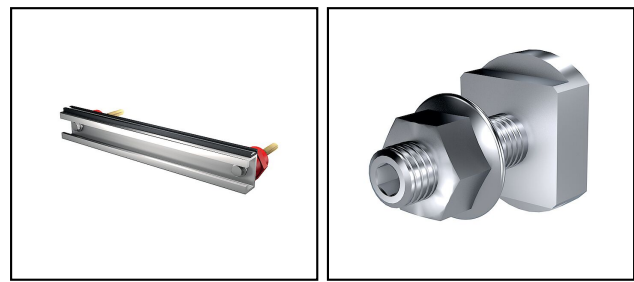

**Characteristics**  
Including pin insulators-sets (halogen and silicone-free)  
The terminal screws must be ordered separately  
The number of connections may vary depending on the width of the connected cable lugs.

**Legend**  
a) Connection bolt M8  
b) Connection bolt M10  
c) Connection bolt M12

| Article-Nr. | E-Number    |       |    |  |       |     |     |  |  |   |
|-------------|-------------|-------|----|--|-------|-----|-----|--|--|---|
| 266.100.020 | 150 574 425 | CuvSn | 20 |  | 35x20 | 650 | 245 |  |  | 1 |



Technical Specifications: **Equipotential profile PA 30**

|                          |                     |
|--------------------------|---------------------|
| Article No.              | 266.100.020         |
| Material                 | CuvSn               |
| Number of connections    | 20                  |
| Band size                | 35x20               |
| Length a                 | 650 mm              |
| Band section             | 245 mm <sup>2</sup> |
| Commercial specification |                     |
| Customs number           | 85389000            |
| country of origin        | CH                  |
| Logistic specification   |                     |
| VPE Weight               | 1.67 kg             |

