
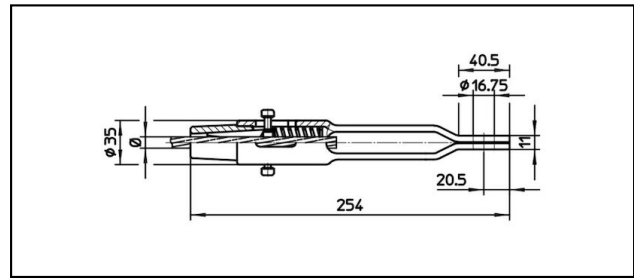


Eyelet collar sockets CuNiSi

**OCL254** Eyelet collar socket

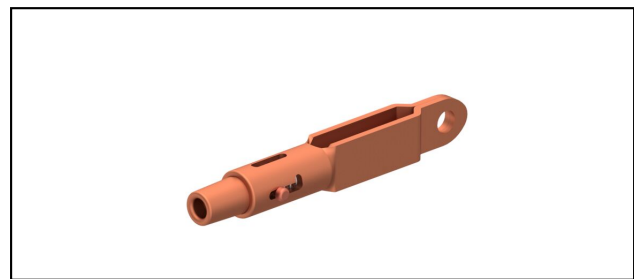

**Application**  
Cu, Cu-steel or Bz tensioned cables

**Characteristics**  
Service load min. 3 kN / max. 25 kN  
Breaking load of corpus min. 80 kN

**Material**  
Corpus CuNiSi / Collet AIBz

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|--|--|-------------------------------------------------------------------------------------|
| 615.235.000 | S35                                                                               | 7.5                                                                               | 35                                                                                |  |  |  |  |  | 0.91                                                                                |



Technical Specifications: **Eyelet collar socket OCL254**

|                               |                    |
|-------------------------------|--------------------|
| Article No.                   | 615.235.000        |
| <b>Rail product name</b>      | S35                |
| <b>Catenary wire diameter</b> | 7.5 mm             |
| <b>Catenary wire section</b>  | 35 mm <sup>2</sup> |
| Commercial specification      |                    |
| <b>Customs number</b>         | 85359000           |
| <b>country of origin</b>      | undefined          |
| Logistic specification        |                    |
| <b>Kilo / piece</b>           | 0.91 kg            |