


Cable droppers

■ SHTF1/10V Feeding, adjustable

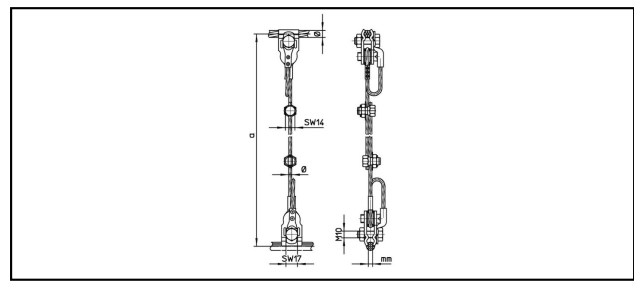

**Application**  
Suspension for contact wire, current feeding

**Characteristics**  
Other lengths and contact wire grooves on request

**Material**  
Clamp CuNiSi / Wire Bz 2

| Article-Nr. |             |          |            |            |     |    |   |  |       |
|-------------|-------------|----------|------------|------------|-----|----|---|--|-------|
| 625.169.595 | 12.5 - 17.5 | 95 - 185 | 3.75 - 8.5 | 600 - 1000 | 4.5 | 10 | 3 |  | 0.515 |

Technical Specifications: Feeding, adjustable SHTF1/10V

|                          |                |
|--------------------------|----------------|
| Article No.              | 625.169.595    |
| Length a                 | 600 - 1000 mm  |
| Catenary wire diameter   | 12.5 - 17.5 mm |
| Catenary wire section    | 95 - 185 mm²   |
| Contact wire groove      | 3.75 - 8.5 mm  |
| Dropper wire diameter    | 4.5 mm         |
| Dropper wire section     | 10 mm²         |
| Slipping force           | 3 kN           |
| Commercial specification |                |
| Customs number           | 85359000       |
| country of origin        | CH             |
| Logistic specification   |                |
| Kilo / piece             | 0.515 kg       |

