


Cable droppers

**SHTF4/16V** Feeding, adjustable

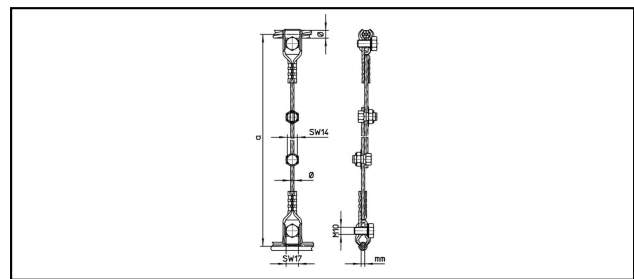

**Application**  
Suspension for contact wire, current feeding

**Characteristics**  
Other lengths and contact wire grooves on request

**Material**  
Clamp CuNiSi / Wire Bz 2

**Legend**  
1) Wire provided by customer  
2) Wire Cu

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 625.608.004 | 6.5 - 12.5                                                                        | 25 - 95                                                                           | 3 - 8.5                                                                           | 1350 - 1850                                                                       | 6                                                                                 | 16                                                                                  | 5                                                                                   | 0.569                                                                               | 1                                                                                   |

Technical Specifications: Feeding, adjustable SHTF4/16V

|                          |                |
|--------------------------|----------------|
| Article No.              | 625.608.004    |
| Length a                 | 1350 - 1850 mm |
| Slipping force           | 5 kN           |
| Dropper wire diameter    | 6 mm           |
| Catenary wire diameter   | 6.5 - 12.5 mm  |
| Catenary wire section    | 25 - 95 mm²    |
| Contact wire groove      | 3 - 8.5 mm     |
| Dropper wire section     | 16 mm²         |
|                          |                |
| comment                  | 1              |
| Commercial specification |                |
| Customs number           | 85359000       |
| country of origin        | undefined      |
| Texte                    |                |
| comment                  | 1              |
| Logistic specification   |                |
| Kilo / piece             | 0.569 kg       |

