


Flexible cable droppers

■ SHP4 Flexible cable dropper

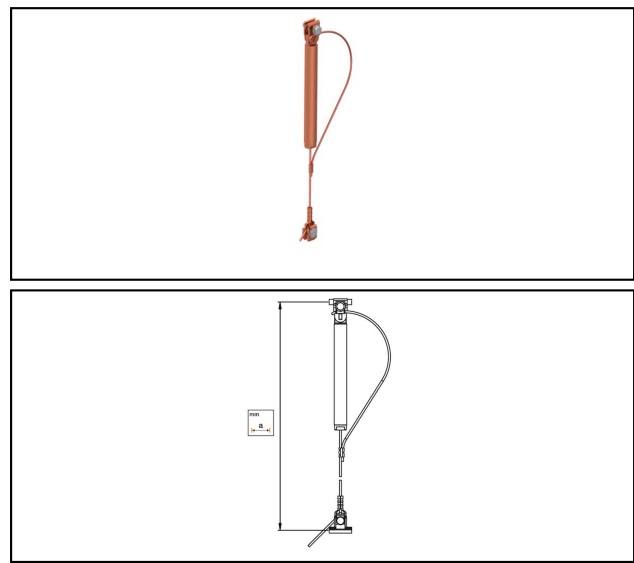

Application
Applicable for all types of AC and DC systems, Current feeding.

Characteristics
Increases the flexibility of the overhead contact system and reduces hard points
Improves the contact quality of the pantograph at high speeds.

Material
CuNiSi

Article-Nr.									
625.622.010	SHP4/1	13 - 16	95 - 150	3 - 8.5	520 - 1600	4.5	10	3.5	1.05
625.622.011	SHP4/1	13 - 16	95 - 150	3 - 8.5	520 - 1600	6	16	3.5	1.05
625.622.020	SHPK4/1	13 - 16	95 - 150	3 - 8.5	450 - 600	4.5	10	3.5	0.95
625.622.030	SHP4/1	6.5 - 13	25 - 95	3 - 8.5	520 - 1600	4.5	10	3.5	1.05
625.622.040	SHP4/10	14 - 18.5	120 - 202	3 - 8.5	520 - 1600	4.5	10	3.5	1.15

Technical Specifications: **Flexible cable dropper SHP4**

	625.622.010	625.622.011	625.622.020	625.622.030
Rail product name	SHP4/1		SHPK4/1	SHP4/1
Catenary wire diameter	13 - 16 mm			6.5 - 13 mm
Catenary wire section	95 - 150 mm²			25 - 95 mm²
Contact wire groove	3 - 8.5 mm			
Length a	520 - 1600 mm		450 - 600 mm	520 - 1600 mm
Dropper wire diameter	4.5 mm	6 mm	4.5 mm	
Dropper wire section	10 mm²	16 mm²	10 mm²	
Slipping force	3.5 kN			
Commercial specification				
Customs number	85359000		0	85359000
country of origin	CH		undefined	CH
Logistic specification				
Kilo / piece	1.05 kg		0.95 kg	1.05 kg

	625.622.040
Rail product name	SHP4/10
Catenary wire diameter	14 - 18.5 mm
Catenary wire section	120 - 202 mm²
Contact wire groove	3 - 8.5 mm
Length a	520 - 1600 mm
Dropper wire diameter	4.5 mm
Dropper wire section	10 mm²
Slipping force	3.5 kN
Commercial specification	
Customs number	85359000
country of origin	undefined
Logistic specification	
Kilo / piece	1.15 kg

