


Forked collar sockets

GCL217/21

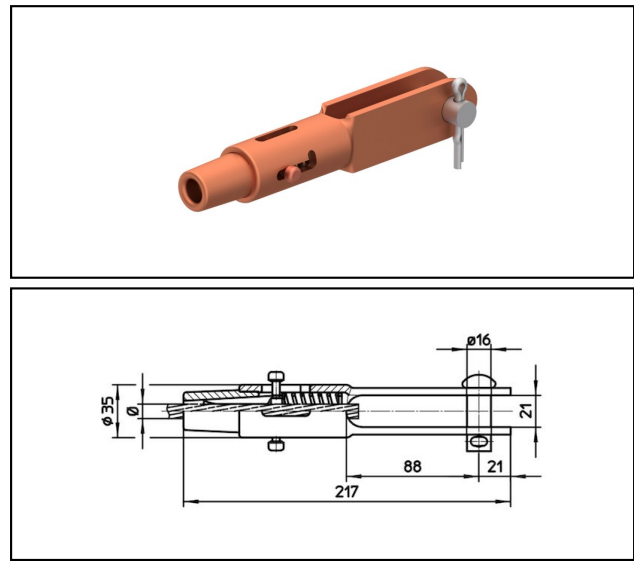

**Application**  
Cu, Cu-steel or Bz tensioned cables

**Characteristics**  
Service load min. 3 kN / max. 25 kN  
Breaking load of corpus min. 80 kN

**Material**  
Corpus CuNiSi / Collet AIBz

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|--|--|-------------------------------------------------------------------------------------|
| 615.111.161 | S65                                                                               | 9.5                                                                               | 65                                                                                |  |  |  |  |  | 0.86                                                                                |
| 615.100.103 | S70                                                                               | 10.8                                                                              | 70                                                                                |  |  |  |  |  | 0.86                                                                                |

Technical Specifications: **GCL217/21**

|                          |             |             |
|--------------------------|-------------|-------------|
|                          | 615.111.161 | 615.100.103 |
| Rail product name        | S65         | S70         |
| Catenary wire diameter   | 9.5 mm      | 10.8 mm     |
| Catenary wire section    | 65 mm²      | 70 mm²      |
| Commercial specification |             |             |
| Customs number           | 85359000    |             |
| country of origin        | CH          |             |
| Logistic specification   |             |             |
| Kilo / piece             | 0.86 kg     |             |

