


Forked collar sockets

GCL227/21

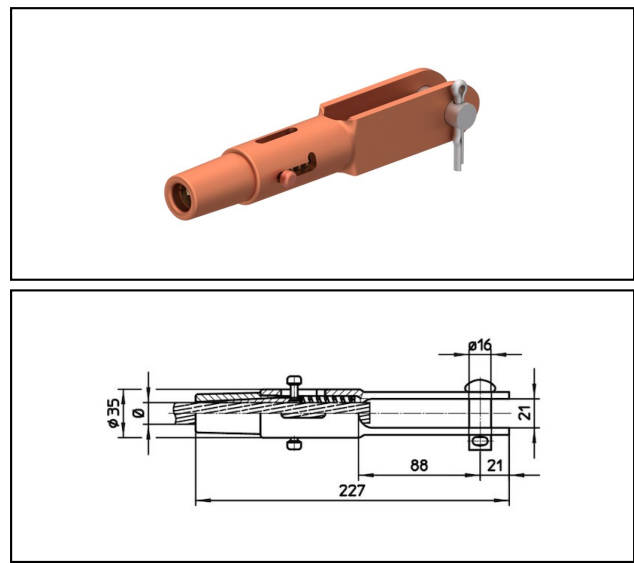

**Application**  
Cu, Cu-steel or Bz tensioned cables

**Characteristics**  
Service load min. 3 kN / max. 25 kN  
Breaking load of corpus min. 80 kN

**Material**  
Corpus CuNiSi / Collet AIBz

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|-------------------------------------------------------------------------------------|
| 615.101.106 | S150                                                                              | 15.8                                                                              | 150                                                                               |                                                                                   |                                                                                   |  |  |  | 0.89                                                                                |
| 615.123.105 | FD120                                                                             |                                                                                   |                                                                                   | 13.8                                                                              | 120                                                                               |  |  |  | 0.91                                                                                |
| 615.109.105 | S120                                                                              | 14                                                                                | 120                                                                               |                                                                                   |                                                                                   |  |  |  | 0.91                                                                                |

Technical Specifications: **GCL227/21**

|                          |             |             |             |
|--------------------------|-------------|-------------|-------------|
|                          | 615.101.106 | 615.123.105 | 615.109.105 |
| Rail product name        | S150        | FD120       | S120        |
| Catenary wire diameter   | 15.8 mm     |             | 14 mm       |
| Catenary wire section    | 150 mm²     |             | 120 mm²     |
| Contact wire diameter    |             | 13.8 mm     |             |
| Contact wire section     |             | 120 mm²     |             |
| Commercial specification |             |             |             |
| Customs number           | 85359000    |             |             |
| country of origin        | CH          |             |             |
| Logistic specification   |             |             |             |
| Kilo / piece             | 0.89 kg     | 0.91 kg     |             |

