


## Forked collar sockets

### ■ GI40/40,B19 Spc.

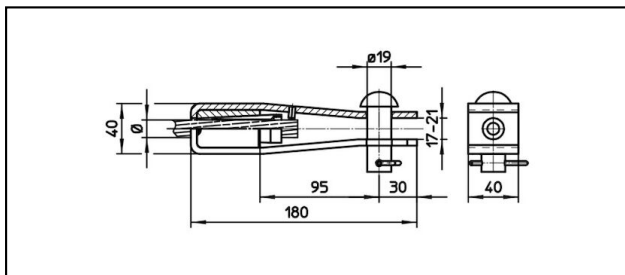

#### Application

For tensioned Cu, Cu-Steel, Steel or Bz cables

#### Characteristics

Service load min. 3 kN / max. 25 kN

Breaking load of corpus min. 60 kN

#### Material

Corpus stainless steel / Collet AlBz / Bolt galvanized steel

| Article-Nr. | «N»   | mm Ø | mm² | mm Ø | mm² |  |  |  | Kg   |
|-------------|-------|------|-----|------|-----|--|--|--|------|
| 610.094.000 | S50   | 9.8  | 50  |      |     |  |  |  | 0.91 |
| 610.085.000 | S70   | 10.8 | 70  |      |     |  |  |  | 0.91 |
| 610.095.000 | S95   | 12.9 | 95  |      |     |  |  |  | 0.91 |
| 610.096.000 | S120  | 14   | 120 |      |     |  |  |  | 0.91 |
| 610.093.000 | FD100 |      |     | 12.4 | 100 |  |  |  | 0.91 |
| 610.084.000 | FD120 |      |     | 13.8 | 120 |  |  |  | 0.91 |

Technical Specifications: **GI40/40,B19 Spc.**

|                               | 610.094.000        | 610.085.000        | 610.095.000        | 610.096.000         |
|-------------------------------|--------------------|--------------------|--------------------|---------------------|
| <b>Rail product name</b>      | S50                | S70                | S95                | S120                |
| <b>Catenary wire diameter</b> | 9.8 mm             | 10.8 mm            | 12.9 mm            | 14 mm               |
| <b>Catenary wire section</b>  | 50 mm <sup>2</sup> | 70 mm <sup>2</sup> | 95 mm <sup>2</sup> | 120 mm <sup>2</sup> |
| <b>Contact wire diameter</b>  |                    |                    |                    |                     |
| <b>Contact wire section</b>   |                    |                    |                    |                     |
| Commercial specification      |                    |                    |                    |                     |
| <b>Customs number</b>         | 85359000           |                    | 0                  | 85359000            |
| <b>country of origin</b>      | CH                 |                    | undefined          | CH                  |
| Logistic specification        |                    |                    |                    |                     |
| <b>Kilo / piece</b>           | 0.91 kg            |                    |                    |                     |

|                               | 610.093.000         | 610.084.000         |
|-------------------------------|---------------------|---------------------|
| <b>Rail product name</b>      | FD100               | FD120               |
| <b>Catenary wire diameter</b> |                     |                     |
| <b>Catenary wire section</b>  |                     |                     |
| <b>Contact wire diameter</b>  | 12.4 mm             | 13.8 mm             |
| <b>Contact wire section</b>   | 100 mm <sup>2</sup> | 120 mm <sup>2</sup> |
| Commercial specification      |                     |                     |
| <b>Customs number</b>         | 85359000            |                     |
| <b>country of origin</b>      | CH                  |                     |
| Logistic specification        |                     |                     |
| <b>Kilo / piece</b>           | 0.91 kg             |                     |

