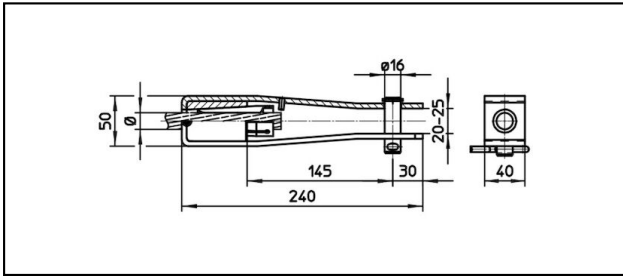


## Forked collar sockets

## ■ GI50/40,B16

**Application**

Tensioned Cu, Cu-Steel, steel or Bz cables

**Characteristics**

Service load min. 3 kN / max. 25 kN

Breaking load of corpus min. 80 kN

**Material**

Corpus stainless steel / Collet AlBz resp. stainless steel

**Legend**

1) Collet of stainless steel for steel cables

2) All components stainless steel A4

| Article-Nr. | «N»        | mm Ø | mm² | mm Ø | mm² |  |  | Kg   |   |
|-------------|------------|------|-----|------|-----|--|--|------|---|
| 610.090.000 | S120       |      |     |      |     |  |  | 1.51 |   |
| 610.000.005 | S150       | 15.8 | 150 |      |     |  |  | 1.51 | 2 |
| 610.047.000 | FD150/S150 | 15.8 | 150 | 15.8 | 150 |  |  | 1.51 |   |
| 610.025.175 | FD193/S160 | 16.8 | 160 | 16.8 | 193 |  |  | 1.51 |   |
| 610.026.111 | S185       | 17.5 | 185 |      |     |  |  | 1.51 |   |
| 610.049.000 | S250       | 21   | 250 |      |     |  |  | 1.51 |   |
| 610.104.000 | S90 St     | 12.4 | 90  |      |     |  |  | 1.51 | 1 |
| 610.059.000 | S101 St    | 15.5 | 101 |      |     |  |  | 1.51 | 1 |
| 610.000.006 | FD150      |      |     | 15   | 150 |  |  | 1.51 |   |

Technical Specifications: **GI50/40,B16**

|                          |             |             |             |             |
|--------------------------|-------------|-------------|-------------|-------------|
|                          | 610.090.000 | 610.000.005 | 610.047.000 | 610.025.175 |
| Rail product name        | S120        | S150        | FD150/S150  | FD193/S160  |
| Catenary wire diameter   |             | 15.8 mm     |             | 16.8 mm     |
| Catenary wire section    |             | 150 mm²     |             | 160 mm²     |
| Contact wire diameter    |             |             | 15.8 mm     | 16.8 mm     |
| Contact wire section     |             |             | 150 mm²     | 193 mm²     |
| Commercial specification |             |             |             |             |
| Customs number           | 85359000    |             |             |             |
| country of origin        | CH          |             |             |             |
| Logistic specification   |             |             |             |             |
| Kilo / piece             | 1.51 kg     |             |             |             |

|                          |             |             |             |             |
|--------------------------|-------------|-------------|-------------|-------------|
|                          | 610.026.111 | 610.049.000 | 610.104.000 | 610.059.000 |
| Rail product name        | S185        | S250        | S90 St      | S101 St     |
| Catenary wire diameter   | 17.5 mm     | 21 mm       | 12.4 mm     | 15.5 mm     |
| Catenary wire section    | 185 mm²     | 250 mm²     | 90 mm²      | 101 mm²     |
| Contact wire diameter    |             |             |             |             |
| Contact wire section     |             |             |             |             |
| Commercial specification |             |             |             |             |
| Customs number           | 85359000    |             |             |             |
| country of origin        | CH          |             |             |             |
| Logistic specification   |             |             |             |             |
| Kilo / piece             | 1.51 kg     |             |             |             |

|                          |             |
|--------------------------|-------------|
|                          | 610.000.006 |
| Rail product name        | FD150       |
| Catenary wire diameter   |             |
| Catenary wire section    |             |
| Contact wire diameter    | 15 mm       |
| Contact wire section     | 150 mm²     |
| Commercial specification |             |
| Customs number           | 85359000    |
| country of origin        | CH          |
| Logistic specification   |             |
| Kilo / piece             | 1.51 kg     |

