


Forked collar sockets

GI50/40,B16

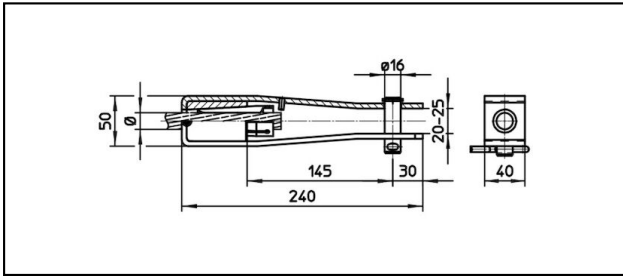

Application

Tensioned Cu, Cu-Steel, steel or Bz cables

Characteristics

Service load min. 3 kN / max. 25 kN

Breaking load of corpus min. 80 kN

Material

Corpus stainless steel / Collet AlBz resp. stainless steel

Legend

1) Collet of stainless steel for steel cables

2) All components stainless steel A4

Article-Nr.									
610.090.000	S120							1.51	
610.000.005	S150	15.8	150					1.51	2
610.047.000	FD150/S150	15.8	150	15.8	150			1.51	
610.025.175	FD193/S160	16.8	160	16.8	193			1.51	
610.026.111	S185	17.5	185					1.51	
610.049.000	S250	21	250					1.51	
610.104.000	S90 St	12.4	90					1.51	1
610.059.000	S101 St	15.5	101					1.51	1
610.000.006	FD150			15	150			1.51	

Technical Specifications: **GI50/40,B16**

	610.090.000	610.000.005	610.047.000	610.025.175
Rail product name	S120	S150	FD150/S150	FD193/S160
Catenary wire diameter		15.8 mm		16.8 mm
Catenary wire section		150 mm²		160 mm²
Contact wire diameter			15.8 mm	16.8 mm
Contact wire section			150 mm²	193 mm²
Commercial specification				
Customs number	85359000			
country of origin	CH			
Logistic specification				
Kilo / piece	1.51 kg			

	610.026.111	610.049.000	610.104.000	610.059.000
Rail product name	S185	S250	S90 St	S101 St
Catenary wire diameter	17.5 mm	21 mm	12.4 mm	15.5 mm
Catenary wire section	185 mm²	250 mm²	90 mm²	101 mm²
Contact wire diameter				
Contact wire section				
Commercial specification				
Customs number	85359000			
country of origin	CH			
Logistic specification				
Kilo / piece	1.51 kg			

	610.000.006
Rail product name	FD150
Catenary wire diameter	
Catenary wire section	
Contact wire diameter	15 mm
Contact wire section	150 mm²
Commercial specification	
Customs number	85359000
country of origin	CH
Logistic specification	
Kilo / piece	1.51 kg

