


Forked collar sockets

■ GI50/40,21.5

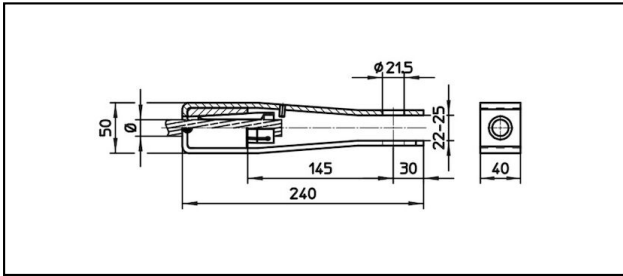

Application

Tensioned Cu, Cu-Steel, steel or Bz cables

Characteristics

Service load min. 3 kN / max. 25 kN

Breaking load of corpus min. 80 kN

Material

Corpus stainless steel / Collet AlBz

Legend

1) With colour code

Article-Nr.	«N»	mm Ø	mm Ø	mm Ø	mm²			Kg	
610.019.106	S150	15.8	150					1.41	
610.063.000	S161	16.8	161					1.41	
610.072.000	S185	17.5	185					1.41	
610.061.000	S202	18.8	202					1.41	
610.069.000	S202	18.8	202					1.41	1
610.021.173	S240-250	21	240 - 250					1.41	
610.073.000	S161	16.8	161					1.41	1
610.079.000	FD193			16.8	193			1.41	1
610.082.000	S185	17.5	185					1.41	1

Technical Specifications: **GI50/40,21.5**

	610.019.106	610.063.000	610.072.000	610.061.000
Rail product name	S150	S161	S185	S202
Catenary wire diameter	15.8 mm	16.8 mm	17.5 mm	18.8 mm
Catenary wire section	150 mm²	161 mm²	185 mm²	202 mm²
Contact wire diameter				
Contact wire section				
Commercial specification				
Customs number	85359000		0	85359000
country of origin	CH		undefined	CH
Logistic specification				
Kilo / piece	1.41 kg			

	610.069.000	610.021.173	610.073.000	610.079.000
Rail product name	S202	S240-250	S161	FD193
Catenary wire diameter	18.8 mm	21 mm	16.8 mm	
Catenary wire section	202 mm²	240 - 250 mm²	161 mm²	
Contact wire diameter				16.8 mm
Contact wire section				193 mm²
Commercial specification				
Customs number	85359000			
country of origin	CH			
Logistic specification				
Kilo / piece	1.41 kg			

	610.082.000
Rail product name	S185
Catenary wire diameter	17.5 mm
Catenary wire section	185 mm²
Contact wire diameter	
Contact wire section	
Commercial specification	
Customs number	85359000
country of origin	undefined
Logistic specification	
Kilo / piece	1.41 kg

