


Forked collar sockets

GI52/45,B20

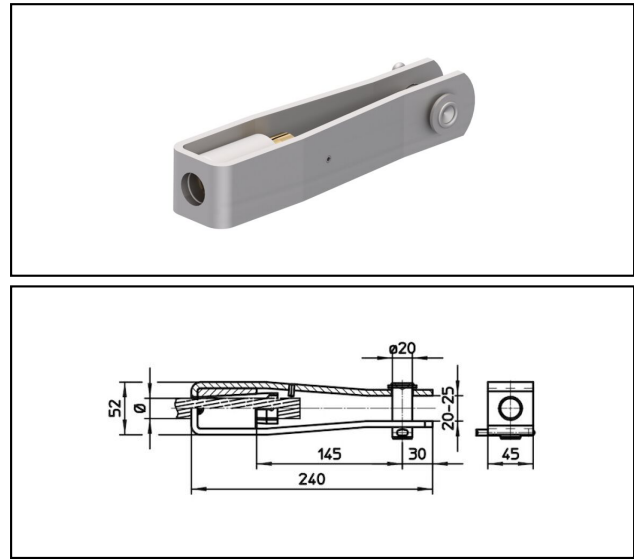

**Application**  
Tensioned Cu, Cu-Steel, steel or Bz cables

**Characteristics**  
Service load min. 3 kN / max. 25 kN  
Breaking load of corpus min.120 kN

**Material**  
Corpus stainless steel / Collet AlBz resp. stainless steel

**Legend**  
1) Collet of stainless steel for steel cables

| Article-Nr. | «N»     | mm Ø | mm² | mm Ø | mm² |  |  | Kg   |   |
|-------------|---------|------|-----|------|-----|--|--|------|---|
| 610.067.000 | S101    | 15.5 | 101 |      |     |  |  | 1.67 | 1 |
| 610.000.010 | S144    | 15.8 | 144 |      |     |  |  | 1.66 |   |
| 610.081.000 | S240    | 21   | 240 |      |     |  |  | 1.66 |   |
| 610.102.000 | S135 St | 15.5 | 135 |      |     |  |  | 1.67 | 1 |
| 610.105.000 | FD150   |      |     | 14.5 | 150 |  |  | 1.66 |   |

Technical Specifications: **GI52/45,B20**

|                          |             |             |             |             |
|--------------------------|-------------|-------------|-------------|-------------|
|                          | 610.067.000 | 610.000.010 | 610.081.000 | 610.102.000 |
| Rail product name        | S101        | S144        | S240        | S135 St     |
| Catenary wire diameter   | 15.5 mm     | 15.8 mm     | 21 mm       | 15.5 mm     |
| Catenary wire section    | 101 mm²     | 144 mm²     | 240 mm²     | 135 mm²     |
| Contact wire diameter    |             |             |             |             |
| Contact wire section     |             |             |             |             |
| Commercial specification |             |             |             |             |
| Customs number           | 85359000    |             |             |             |
| country of origin        | CH          |             |             | undefined   |
| Logistic specification   |             |             |             |             |
| Kilo / piece             | 1.67 kg     | 1.66 kg     |             | 1.67 kg     |

|                               | 610.105.000         |
|-------------------------------|---------------------|
| <b>Rail product name</b>      | FD150               |
| <b>Catenary wire diameter</b> |                     |
| <b>Catenary wire section</b>  |                     |
| <b>Contact wire diameter</b>  | 14.5 mm             |
| <b>Contact wire section</b>   | 150 mm <sup>2</sup> |
| Commercial specification      |                     |
| <b>Customs number</b>         | 0                   |
| <b>country of origin</b>      | undefined           |
| Logistic specification        |                     |
| <b>Kilo / piece</b>           | 1.66 kg             |

