


Forked collar sockets

**GCK146/17** Forked collar socket

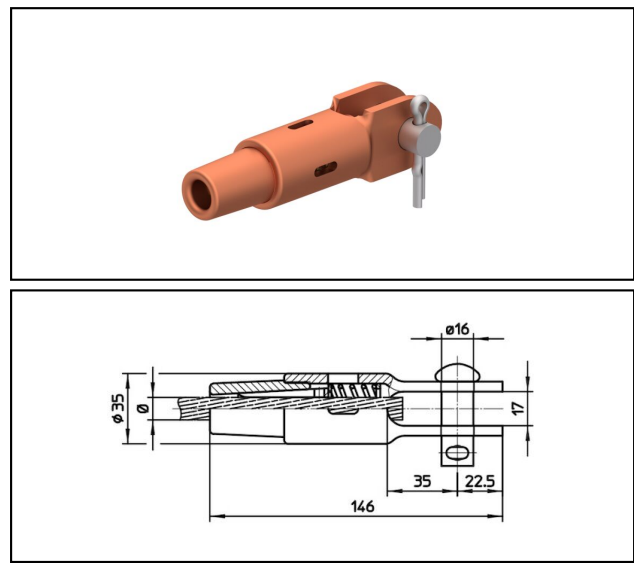

**Application**  
Cu, Cu-steel or Bz tensioned cables

**Characteristics**  
Service load min. 3 kN / max. 25 kN  
Breaking load of corpus min. 80 kN

**Material**  
Corpus CuNiSi / Collet AIBz resp. CuNiSi

| Article-Nr. |  |  |  |  |  |  |  |  |  |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|-------------------------------------------------------------------------------------|
| 615.035.151 | FD107                                                                             |                                                                                   |                                                                                   | 12.8                                                                              | 107                                                                               |  |  |  | 0.6                                                                                 |

Technical Specifications: **Forked collar socket GCK146/17**

|                              |                     |
|------------------------------|---------------------|
| Article No.                  | 615.035.151         |
| <b>Rail product name</b>     | FD107               |
| <b>Contact wire diameter</b> | 12.8 mm             |
| <b>Contact wire section</b>  | 107 mm <sup>2</sup> |
| Commercial specification     |                     |
| <b>Customs number</b>        | 85359000            |
| <b>country of origin</b>     | CH                  |
| Logistic specification       |                     |
| <b>Kilo / piece</b>          | 0.6 kg              |

