


Conductor connections and junctions

■ FE 87    Grounding point for welding

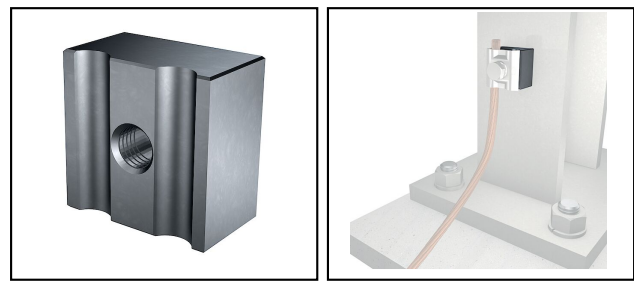

| Article-Nr. | E-Number    |    |     |        |    |    |    |    |    |
|-------------|-------------|----|-----|--------|----|----|----|----|----|
| 260.079.000 | 156 941 230 | St | M10 | 8 - 10 | 50 | 35 | 35 | 20 | 10 |

| Accessories                                              |             |   |    |        |        |        |  |       |    |
|----------------------------------------------------------|-------------|---|----|--------|--------|--------|--|-------|----|
| <div> <div>Connection plate and screw FE 85</div> </div> |             |   |    |        |        |        |  |       |    |
| Article-Nr.                                              | E-Number    |   |    |        |        |        |  |       |    |
| 285.099.025                                              | 156 831 650 | H | ok | InoxA4 | M10x25 | 6 - 10 |  |       | 25 |
| 260.071.002                                              | 156 831 660 | H | ok | InoxA4 | M10x25 | 6 - 10 |  | a)    | 1  |
| 260.071.001                                              | 156 831 670 | H | ok | InoxA4 | M10x25 | 6 - 10 |  | a)+b) | 10 |

Technical Specifications: **Grounding point for welding FE 87**

|                                 |             |
|---------------------------------|-------------|
|                                 | 260.079.000 |
| Material                        | St          |
| Internal thread                 | M10         |
| Wire diameter                   | 8 - 10 mm   |
| Nominal cross section conductor | 50 mm²      |
| Length a                        | 35 mm       |
| Width b                         | 35 mm       |
| Height c                        | 20 mm       |
| Commercial specification        |             |
| Customs number                  | 85389000    |
| country of origin               | CH          |
| Logistic specification          |             |
| VPE Weight                      | 1.74 kg     |

