


Section insulators

■ FTBM1 Section insulator

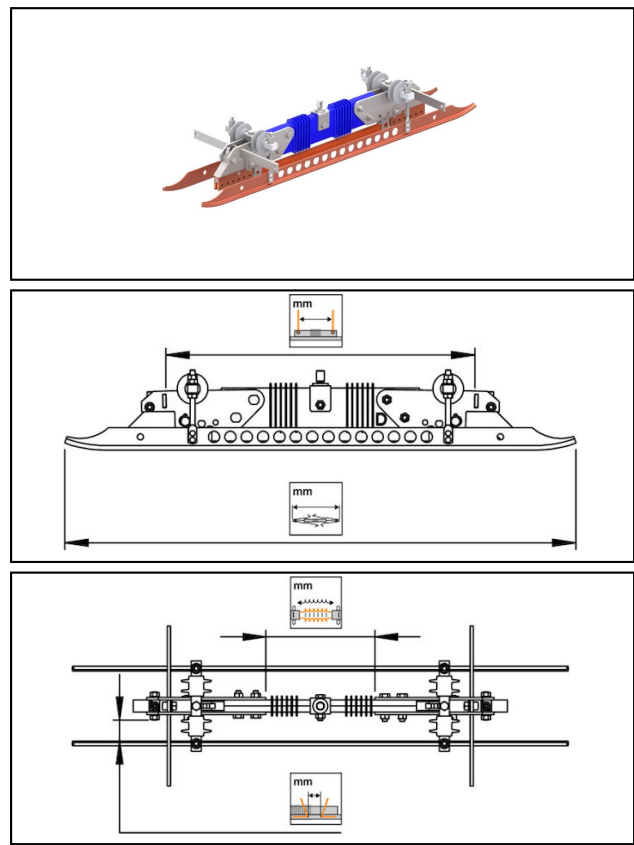

Application
For tramway with trolley and pantograph operation
Maximum speed up to 70 km/h

Material
GRP/silicone, Polyamid, Cu, stainless steel

Article-Nr.									
655.336.739	80 - 152	5.6	370	610	500	40	1000	max.12	10

Accessories									
 SAL									
Article-Nr.									
696.016.010	Al	1610							1.2

Accessories									
 Turnbuckle SSCH110-135									
Article-Nr.									
695.002.671	110 - 135								0.192

Accessories									
 Turnbuckle SSCH95-125									
Article-Nr.									
695.001.670	95 - 125								0.139



Accessories



Turnbuckle SSCH200-280

Article-Nr.									
690.010.727	200 - 280	15						0.163	1, 3
690.023.727	200 - 280	15						0.163	1, 2
690.025.727	200 - 280	18	8					0.163	1, 2
690.035.000	200 - 280	18	8					0.163	1, 3
690.038.000	200 - 280	18	8					0.163	1, 3, 4

Technical Specifications: **Section insulator FTBM1**

Article No.	655.336.739
Contact wire section	80 - 152 mm²
Contact wire groove	5.6 mm
Creeping distance	370 mm
Length between suspension	610 mm
Length between contact wire	500 mm
Arcing horn distance	40 mm
Total length	1000 mm
Recommended service load	max.12
Specified mechanical load (SML)	80 kN
Minimum breaking load of the section insulator	60 kN
Commercial specification	
Customs number	85353000
country of origin	CH
Logistic specification	
Kilo / piece	10 kg

