


Down-conductor components

AL 60 Lightning protection measurements

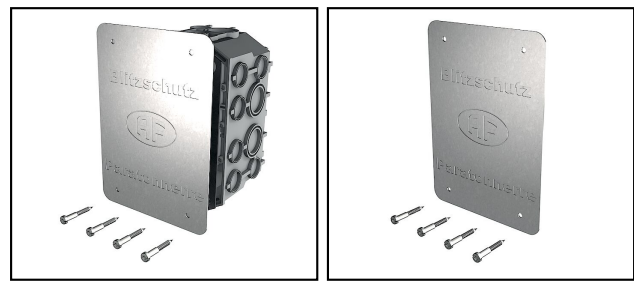

**Characteristics**  
For isolated facing  
Eruption site for protective sleeve Ø 20mm  
Splashproof cover with neoprene gasket. Fastener with four cross recessed screws

**Legend**  
a) Set complete incl. box, cover and 4 screws  
b) Cover and 4 screws

| Article-Nr. | E-Number    |  |  |  |  |  |  |  |  |  |
|-------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|--|--|--|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 276.030.000 | 155 170 305 | InoxA2                                                                            | 115                                                                               | 95                                                                                | 170                                                                               |  |  |  | a)                                                                                  | 1                                                                                   |
| 270.002.001 | 155 970 305 | InoxA2                                                                            | 130                                                                               |                                                                                   | 185                                                                               |  |  |  | b)                                                                                  | 1                                                                                   |

Technical Specifications: **Lightning protection measurements AL 60**

|                                           |                                      |                          |
|-------------------------------------------|--------------------------------------|--------------------------|
|                                           | 276.030.000                          | 270.002.001              |
| Material                                  | InoxA2                               |                          |
| Length a                                  | 115 mm                               | 130 mm                   |
| Width b                                   | 95 mm                                |                          |
| Height c                                  | 170 mm                               | 185 mm                   |
| Length                                    | 170 mm                               | 185 mm                   |
| Width                                     | 115 mm                               | 130 mm                   |
| Model                                     | Other                                | Signalling cover         |
| Housing feed-through by break-out opening | Yes                                  |                          |
| Sealable                                  | No                                   |                          |
| Equipped with                             | None                                 |                          |
| For tubediameter                          | 20/25 mm                             |                          |
| Colour                                    | Grey                                 | Other                    |
| Surface protection                        | unbehandelt                          |                          |
| Type of fastening                         |                                      | Cover for screw mounting |
| With screening                            | No                                   |                          |
| For box-/housing width                    |                                      | 115 mm                   |
| Depth                                     | 95 mm                                |                          |
| With screws                               |                                      | Yes                      |
| Mounting method                           | Flush mounted (plaster)              |                          |
| Shape                                     | Rectangular                          | Square                   |
| Cover plate                               | Not transparent                      |                          |
| Construction type                         | Device connection box (round/square) |                          |
| For box-/housing length                   |                                      | 170 mm                   |
| Wind proof                                | No                                   |                          |
| Halogen free                              | Yes                                  |                          |
| Cover attachment                          | Bolted                               |                          |
| Number of inlets                          | 2                                    |                          |
| Commercial specification                  |                                      |                          |
| Customs number                            | 73262000                             |                          |
| country of origin                         | CH                                   |                          |
| Logistic specification                    |                                      |                          |
| VPE Weight                                | 0.578 kg                             | 0.23 kg                  |